

SPACEBORNE SENSORS TRACK MARINE DEBRIS CIRCULATION IN THE GULF OF MEXICO

Ross Reahard, Project Lead
Brandie Mitchell, Student Director
Lucas Lee, Project Lead
Candis Mallett, Team Member
Aaron Albin, Team Member
Shelby Barrett, Team Member
NASA DEVELOP Program
Stennis Space Center, MS 39529
rreahard@uno.edu
brandie.s.mitchell@nasa.gov
lucas.w.lee@gmail.com
candis.mallett@hotmail.com
albin.aaron@gmail.com
shelby.g.barrett@gmail.com

ABSTRACT

Marine debris is a problem for coastal areas throughout the world, including the Gulf of Mexico. To aid the NOAA Marine Debris Program in monitoring marine debris dispersal and regulating marine debris practices, sea surface height and height anomaly data provided by the Colorado Center for Astrodynamics Research at the University of Colorado, Boulder, were utilized to help assess trash and other discarded items that routinely wash ashore in southeastern Texas, at Padre Island National Seashore. These data were generated from the NASA radar altimeter satellites TOPEX/Poseidon, Jason 1, and Jason 2, as well as the European altimeter satellites ERS-1, ERS-2 (European Remote Sensing Satellite), and ENVISAT (Environmental Satellite). Sea surface temperature data from MODIS were used to study of the dynamics of the Loop Current. Sea surface height and MODIS data analysis were used to show that warm water in the core of eddies, which periodically separate from the Loop Current, can be as high as 30 cm above the surrounding water. These eddies are known to directly transfer marine debris to the western continental shelf and the elevated area of water can be tracked using satellite radar altimeter data. Additionally, using sea surface height, geostrophic velocity, and particle path data, foretracking and backtracking simulations were created. These simulation runs demonstrated that marine debris on Padre Island National Seashore may arise from a variety of sources, such as commercial fishing/shrimping, the oil and gas industry, recreational boaters, and from rivers that empty into the Gulf of Mexico.

Keywords: marine debris, eddies, barrier island beach, Padre Island National Seashore, radar altimetry, surface circulation, Gulf of Mexico, NASA DEVELOP

INTRODUCTION

Marine debris is a problem for many of the world's coastlines, and the Gulf of Mexico is no exception. In the Gulf of Mexico, clockwise-rotating areas of warm water, or eddies periodically separate from the Loop Current. These eddies vary in size from 100-200 km in diameter and travel westward towards the Texas coast at speeds ranging from 2-5 km per day. The Loop Current and the eddies directly transfer debris to the western continental shelf. The overall prevailing wind direction is to the west, and this force additionally drives and transports the debris to the western Gulf of Mexico's inner continental shelf. From the shelf, the oblique wind directions create two longshore transport cells. The convergence point of these two cells is inside Padre Island National Seashore in southeastern Texas. Initially, the convergence point was a deposition site for submersed aquatic vegetation and shells. Presently, it accumulates vast quantities of anthropogenic marine debris (National Park Service, 2008).

The beaches of Padre Island are now routinely littered with trash and other discarded items from the petroleum industry, commercial fishing vessels, recreational boaters, and other sources (National Park Service, 2008). This

debris can potentially generate a variety of human health risks to individuals who may frequent the island for recreational activity, such as locals or tourists. For income, Padre Island's economy is heavily dependent on sport fishing, kayaking, and beach recreation, and ecotourism plays a major role in the Coastal Bend's tourism-based economy (Lee, 2009). The total impact of ecotourism on household earnings is \$233.5 million and on employment is 8,748 jobs (Lee, 2009). Marine debris on the coastline can influence the return rate of ecotourists and have a disastrous effect on the local economy. Padre Island, which is nearly 70 miles long, is the largest undeveloped beach in the world and can accumulate up to one ton of marine debris per linear mile (National Park Service, 2005b). Due to the island's large extent, there is a substantial amount of marine debris accumulation, and this in turn can become a significant human health concern. For example, waste materials that accumulate along the seashore, like used medical syringes and broken glass, pose as physical hazards to humans. Other waste items, such as used condoms and tampon applicators, can transmit disease. Additionally, these items can affect water quality and could correspondingly, result in illness (Sheavly, 2007). Water that has been polluted with harmful bacteria and viruses, upon consumption or skin contact, "can result in infectious hepatitis, diarrhea, bacillary dysentery, skin rashes, and even typhoid and cholera" (Sheavly, 2007).

The biota of Padre Island can also be threatened by the accumulation of marine debris. Padre Island is situated along the Central Flyway, which is an important migration route for American birds. Three hundred and eighty different bird species visit the island annually; this includes nearly half of all bird species documented in America, including migratory, overwintering, and resident bird species (National Park Service, 2011a). According to the National Park Service (2011a), thirteen of these species are known to be threatened or endangered. Endangerment of these migrating shore birds could be increased if they were to ingest marine debris that was either toxic debris or non-food items. Debris, upon ingestion, could abate the absorption of vital nutrients, and/or upon entanglement, can suffocate the birds (Ryan, 1990). Furthermore, if adult birds consumed debris and then regurgitated it to feed their chicks, this can lead to the death of the young and lowers nesting colony production (Laist, 1987; Fry et al., 1987).

Throughout the Gulf of Mexico region, marine debris monitoring and cleaning up programs have been established, however, currents and eddies transfer marine debris over great distances, and these effects can challenge efficient monitoring and cleanup efforts. In 2006, former President George W. Bush signed into law the Marine Debris Research, Prevention, and Reduction Act (NOAA Marine Debris Program, 2011). After Hurricanes Katrina, Rita, and Ike, NOAA created the Marine Debris Program under former President Bush's Marine Debris Research, Prevention and Reduction Act. This act established NOAA's Marine Debris Program, among other tasks, to attempt to reduce the amount of marine debris in the Gulf of Mexico. Following the formation of a partnership with the US Coast Guard, the Marine Debris Program began to use sonar to survey the Gulf of Mexico coastline for underwater debris. However, the program does not currently utilize spaceborne sensors to analyze floating marine debris and its relationship to the Gulf of Mexico Loop Current and surrounding eddies. For large-scale monitoring of surface circulation processes which transport marine debris the Marine Debris program and others like it would benefit from the capabilities that NASA satellites such as TOPEX/Poseidon, Jason-1, Jason-2 and other remote sensing platforms with radar altimeters provide.

For this project we partnered with NOAA's Marine Debris Program, the Padre Island National Seashore Education and Outreach Department, and the Colorado Center for Astrodynamics Research located at the University of Colorado, Boulder. The research from this project will provide NOAA's Marine Debris Program with a better understanding of how the Gulf of Mexico Loop Current and surface circulation patterns affect coastal area marine debris dispersal. Padre Island National Seashore will use the maps, visualizations and satellite data products produced by this project in their education and outreach programs, such as Talking Trash. Each year the Talking Trash program educates over 10,000 Texas middle and high school students about marine debris and pollution by discussing its effects on the environment. Dr. Robert Leben and his colleagues at the Colorado Center for Astrodynamics Research have played a key role in developing the methodologies for marine debris monitoring by providing sea surface height anomaly data. These methodologies will be transferred to the project partners, enabling them to track and monitor the Loop Current in the future.

STUDY AREA

The study area for this project includes the entire Gulf of Mexico with a specific focus on Padre Island National Seashore, Texas (Figure 1). Padre Island is located along the southern Texas Gulf Coast (Figure 1) and "is the world's longest undeveloped stretch of barrier island" (National Park Service, 2011b). The island is oriented north-

south, the Gulf of Mexico lies to the east and Laguna Madre lies adjacent to the west. In 1964, the artificially-dredged Port Mansfield Channel divided the island and as a result, the terms "North Padre Island" and "South Padre Island" are often used to refer to the separate portions of the island (National Park Service, 2005a). Padre Island includes Padre Island National Seashore. The national seashore is approximately 70 miles (110 km) long with 65.5 miles (105.4 km) of Gulf beach. A variety of pristine beach, dune, and tidal flat environments can be found within the park.



Figure 1. Gulf of Mexico region with an inset map of Padre Island, Texas.

Study Period

The project partners at NOAA's Marine Debris Program expressed interest in altimeter and remotely sensed data from 2008-2010. Therefore, the study period for this project ranges from the beginning of 2008 to the end of 2010. The Colorado Center for Astrodynamics Research provided SSH data for this time frame. This study period will also enable the analysis of the effects hurricanes, such as Gustav and Ike, have had on the dispersal of marine debris. After the 2010 BP oil spill incident, surface circulation processes in the Gulf of Mexico gained national attention. Since the oil spill occurred during the designated study period, data collected may prove additionally useful for studying the dispersal of oil.

METHODOLOGY

Data Acquisition

Sea Surface Height Anomaly. Sea surface height anomaly data were provided by the Colorado Center for Astrodynamics Research (CCAR) at the University of Colorado, Boulder. This daily dataset requires the use of many altimeter satellites including: TOPEX/Poseidon, Jason 1, Jason 2, ERS-1, ERS-2, and Envisat. The sea surface height anomaly was calculated by combining all of the raw altimeter data for each satellite into separate cycle files. The data were referenced to a mean sea surface height model to generate sea surface height

anomaly. The along-track data were next interpolated to a reference ground track to insure there are always samples at the same geographic location for each cycle. Then, the data were detrended using a linear least squares smoothing filter to remove all of the low frequency data. To produce a daily product from satellites that have repeat cycles ranging from 10 days (Jason) to 35 days (Envisat), a specific amount of data are used from each satellite for the day of interest. For example, if data are being processed for January 15th, and Jason 1 and Envisat data are available, data is taken from Jason 1 for January 10th-20th and Envisat for December 28th - February 1st. A full 10-day cycle of Jason data and a full 35 day cycle of Envisat data around the day of interest are used. The two datasets are then combined using a weighting scheme that places less emphasis on data that is farther away from the day of interest. Using a multi-grid technique, the along track data is used to fully populate a 0.25-degree evenly spaced grid. Once the data is gridded, it is referenced to a model mean to produce an estimated absolute sea surface height of the Gulf of Mexico. The Colorado Center for Astrodynamics Research at the University of Colorado, Boulder conducted the processing to calculate sea surface height anomaly (Leben, 2002).

MODIS Sea Surface Temperature. Four-kilometer spatial resolution, weekly, MODIS Sea Surface Temperature (SST) data was downloaded from NASA's OceanColor Web (NASA, 2011) as a Level 3 mapped product. MODIS SST data is available in a variety of spatial and temporal resolutions; spatially at 4km and 9km, and temporally at daily, weekly (8 day), and monthly. The Level 3 mapped products used in this study are global gridded data sets with all points filled, even over land. The Level 3 binned products only contain bins with valid SST data. No land bins are kept. All mapped products are derived from the binned products. MODIS SST measurements are derived from the MODIS thermal infrared channels (11-12um). MODIS SST data was downloaded for the time period between November 17th, 2009 to June 17th, 2010.

Wind Data. Wind data used in this study was acquired from the National Data Buoy Center (NDBC)'s historical data archives (NOAA, 2010). The NDBC is a branch of the National Oceanic and Atmospheric Administration (NOAA) that, "provides high quality meteorological/environmental data in real time from automated observing systems that includes buoys and a Coastal-Marine Automated Network (C-MAN) in the open ocean and coastal zone surrounding the United States" (NOAA, 2009). Meteorological measurements from the buoys are recorded every day, every hour, every ten minutes (Historical wind data available at http://www.ndbc.noaa.gov/maps/west_gulf_hist.shtml).

The primary wind parameters used for this project were wind direction and wind speed. Data was acquired from each of three (NDBC) buoy stations--42020, 42019, & 42002--over the past five years. For buoy 42020 the years were 2006, 2007, 2008, 2009, & 2010; for buoy 42019 the years were 2006, 2007, 2008, 2009, & 2010; for buoy 42002 the years were 2005, 2006, 2007, 2008, & 2009 (this buoy malfunctioned during the year 2010).

Data Processing

Geostrophic Flow Velocities. A Matlab program was written to calculate geostrophic flow velocities (Figure 2) using the sea surface height data that was provided by the Colorado Center for Astrodynamics Research. Geostrophic flow velocities were calculated as a balance of the horizontal pressure gradient and the Coriolis force. However, flow is also affected by other variables, such as friction. The equations used to calculate geostrophic flow assume that the flow has no acceleration, the horizontal velocities are much larger than the vertical, the only external force is gravity, and the friction is small. The equation used to calculate geostrophic flow follows Marshall et al. (2003):

$$\text{Geostrophic Flow} = \sqrt{u^2 + v^2} \quad \text{Where: } u = -\frac{g}{f} \frac{\partial h}{\partial y} \quad \text{and} \quad v = \frac{g}{f} \frac{\partial h}{\partial x}$$

Where:

g = gravity

$f = 2\Omega \sin(\phi)$ where: Ω is the rotation rate of the earth (7.2921159×10^{-5} rad/sec), and ϕ is the latitude (This equation is the Coriolis parameter)

h = sea surface height

y = latitude

x = longitude

After this equation is run in Matlab to calculate surface velocity, the “quiver” command is used to create a vector field showing flow direction and magnitude.

Particle Paths. Particle paths can be tracked by using a numerical integration method to integrate through time and space. The previous term DEVELOP team used Euler’s integration method to track a particle’s path by using the following equation (Weisstein):

$$\begin{aligned}x_{n+1} &= x_n + v(t_n) * \Delta t \\t_{n+1} &= t_n + \Delta t\end{aligned}$$

Where x = position, v = velocity, and t = time

For this term’s DEVELOP team, a higher-order integration method was used to more accurately track particle paths. The second-order Runge-Kutta method, which uses a trial step at the midpoint of an interval to cancel out lower-order errors, was implemented. This particular method was chosen because it provided the necessary accuracy needed without requiring a significant amount of processing time (Weisstein):

Given a vector φ_n of unknowns at time t_n and the first order differential equation $\frac{d\varphi}{dt} = f(\varphi, t)$, the second order Runge-Kutta estimate for φ_{n+1} is given by:

$$\begin{aligned}k_1 &= \Delta t * f(\varphi_n, t_n) \\k_2 &= \Delta t * f\left(\varphi_n + \frac{1}{2}k_1, t_n + \frac{1}{2}\Delta t\right) \\\varphi_{n+1} &= \varphi_n + k_2\end{aligned}$$

Where $\Delta t = t_{n+1} - t_n$

In our case, φ would be calculated for both the longitude and latitude components. This equation was applied in Matlab and built upon the equations for geostrophic flow.

Foretracking and Backtracking Simulations. A cluster of particles was initially placed near known oil and gas infrastructure. Foretracking analysis was performed to determine the possible dispersal and locations of these particles. The initial particles in Figure 4, (left map) are traced for a 60-day period. This procedure was done for each day in January 2008 and the cumulative results are shown in Figure 4 (right map). Particle backtracking was performed to gain a better understanding of where debris on Padre Island National Seashore may have originated. Below, the initial particle positions shown in Figure 5 (left map), are traced back for a period of 60 days. This backtracking is done for each day in January 2010 and the collective resulting particle positions are shown in Figure 5 (right map).

MODIS Time Series. MODIS Sea Surface Temperature (SST) data was downloaded from NASA’s Oceancolor Web (NASA, 2011) as compressed archive files (.tar.gz format) and then extracted to the original Hierarchical Data Format (.HDF). Data was then converted from the original .HDF format into the native ERDAS .img format using ERDAS Imagine. Then, the data was imported into ArcMap to apply a color ramp. A stretched color ramp was used to symbolize the SST value. The goal of this procedure was to create an absolute color scale that allows direct comparison for each image. The files were then saved in .JPG format for later use in a time-series animation and graphics created using Windows Live Movie Maker. The animation consists of a simple time series slideshow of SST data images with corresponding date ranges and color scales.

Wind Data. The meteorological program WRPLOT that was used to analyze the wind data only accepts data for every hour, so the raw data from the National Data Buoy Center has to be converted into an acceptable format (Lakes Environmental Software, 1995-2011). The WRPLOT program only accepts data within certain

formats, i.e. the Lakes Format, so the data was converted to this format. Since there was a large volume of raw data, a simple C++ program was written to automate the process of arranging the raw data files into the 'Lakes Format'. For this format, the raw data is arranged by columns in the order of year, month, day, hour, minute, wind direction, wind speed, GDR, GST and GTIME (descriptions and measurements of this data are available at www.ndbc.noaa.gov/measdes.shtml). The Lakes Format required the columns be arranged in the order of station ID, year, month, day, hour, wind direction and wind speed (all units of measurements being the same). Additionally, the first line of the Lakes Format data file must state "Lakes Format".

After the data were converted to Lakes Format, it was imported to the WRPLOT program (Lakes Environmental Software, 1995-2011) which is then used to create a wind rose for visualizing the wind data. Then, the wind rose was exported directly to Google Earth; however, the point of location in degrees, minutes, and seconds must be known prior to exporting the wind rose. Wind roses for 5-year data from each of the four seasons were also created.

RESULTS

Analysis of Results

Radar Altimeter Data. Radar altimeter data from several NASA and European Space Agency (ESA) remote sensing platforms was processed to produce maps of sea surface height, sea surface height anomaly, geostrophic velocities, and to predict particle paths. A map of processed sea surface height and height anomaly data (Figure 1) demonstrated that the warm waters of the Loop Current can raise the local sea level by over 30 cm in the location where the Loop Current flows into and exits the Gulf of Mexico. The eddies that are separate from the loop current are warm core eddies, and the center of these eddies also have an elevating effect on local water levels. The water in the core of one of these eddies can also be as high as 70 cm above the waters surrounding it (Figure 1). As an eddy moves across the Gulf of Mexico, it can be tracked by following the area of elevated water.

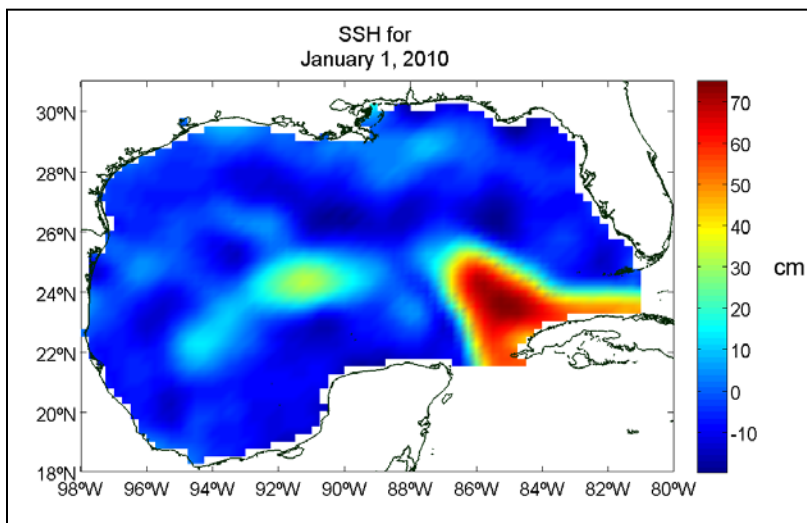


Figure 1. Example of SSH Product created from blended satellite altimeter data processed in Matlab.

A map of geostrophic velocities (Figure 2) shows the Loop Current is a relatively fast-moving current. The highest velocities were mainly observed where the Loop Current enters the Gulf of Mexico through the Yucatan Channel (Figure 2). Relatively high velocities are also observed where the current exits the Gulf through the Florida Straits (Figure 2). This could be due the flow of the current becoming narrower and more channelized as it goes though the Yucatan Channel and Florida Straits. As the flow of the current moves farther north into the Gulf of Mexico, its flow field begins to expand and loses stability. This loss of stability is what ultimately drives the eddy shedding process.

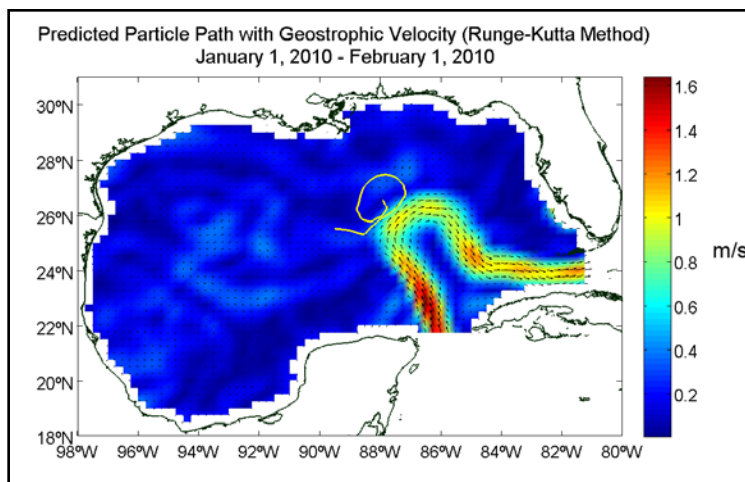


Figure 2. Geostrophic velocity with predicted particle path using Runge-Kutta integration.

Particle path prediction products (example shown between 26-28°N, 94-96°W, Figure 2) were initially produced using the Euler numeric integration technique. The Euler method proved to be fairly inaccurate due to the fact that some predicted particle paths left their respective eddies and re-entered the flow field of the Loop Current. This phenomenon is not observed in reality, and should not be occurring in the model. During the summer term, the DEVELOP team used a different integration technique known as the Runge-Kutta technique. According to advisers at the Colorado Center for Astrodynamics Research, using the Runge-Kutta method will improve the accuracy of the particle path prediction products.

MODIS Sea Surface Temperature. MODIS Sea Surface Temperature (SST) data was used to analyze the dynamics of the Loop Current's position, and to track its flow field and eddy shedding process. MODIS SST data shows the position of the loop current in the Gulf of Mexico is widely variable. The Loop Current will sometimes travel in a nearly direct path through the Yucatan Channel to the Florida Straits. This was seen in the MODIS SST data that was collected during late November and into mid December 2009. By mid to late December 2009 through March 2010, the flow of the Loop Current had taken a more northerly path and showed an extension of its flow field farther north and into the central Gulf. By mid-April 2010, MODIS SST data (Figure 3) showed the flow of the Loop Current began to lose its stability and shed a large eddy. By the middle of June 2010, the eddy appeared to completely separate from the main flow path. The eddy could not be tracked during the summer months of 2010 using MODIS SST data because the warm waters of Gulf of Mexico obscured the warm waters of the Loop Current and its associated eddies.

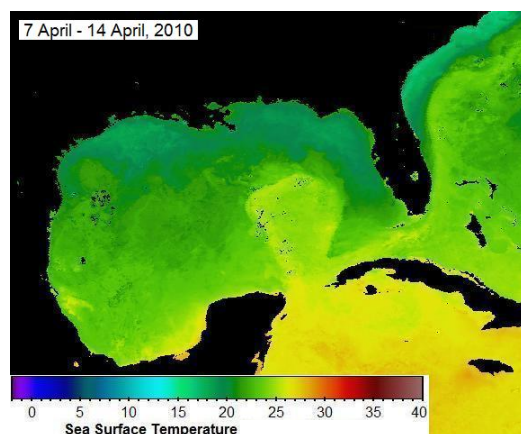


Figure 3. MODIS Sea Surface Temperature in Gulf of Mexico.

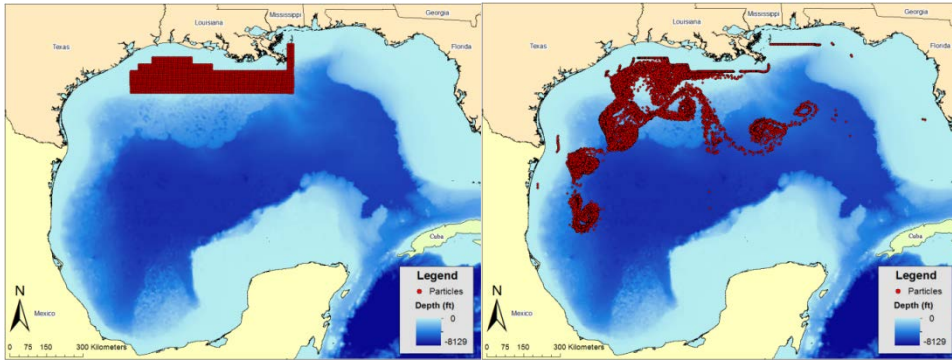


Figure 4. Image on left shows initial placement of particles before 60-day foretracking is performed. Image on right shows cumulative particle locations after the simulation is ran using each day in October, 2010, as the starting date.

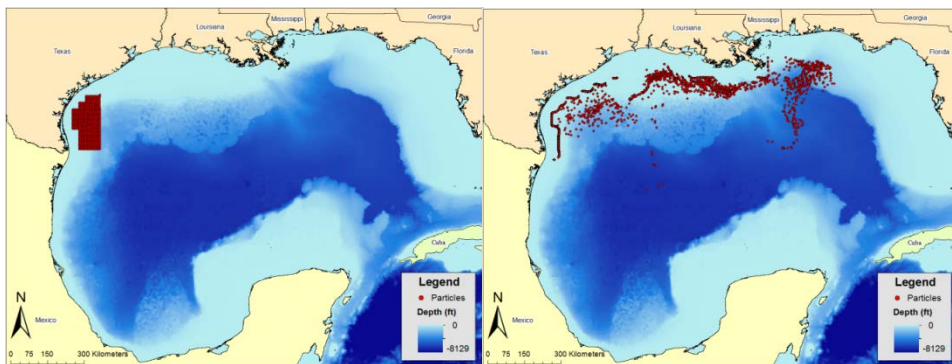


Figure 5. Image on left shows initial placement of particles before 60-day backtracking is performed. Image on right shows cumulative particle locations after the simulation is ran using each day in January, 2010, as the starting date.

Wind Data. The time period used to create the wind roses assumed all data for the past 5 years. Wind roses (Figure 6) were created for three separate buoys (42020, 42019, & 42002), using annual and seasonal data. The wind roses each use 36 wind directions and a contrasting color scheme. The rose can then be exported to a .kml file and imported into Google Earth. The maps show all wind directions and wind speeds for each location. Maps were also created to depict a dominant seasonal wind. Although winds are variable, a dominant South East (SE) to South-South East (SSE) trend was observed in the five-year mean wind data (Figure 6).

Errors and Uncertainty

Particle Path Prediction Products. During the DEVELOP team spring term of this project, Euler's integration method was used. This method has a truncation error of $O(h^2)$. After noticing unrealistic behavior in some of the predicted paths, our advisors at the Colorado Center for Astrodynamics Research suggested using a higher-order integration method to improve the accuracy. During the DEVELOP team summer term, a higher-order integration method was implemented, namely the second-order Runge-Kutta method. The truncation error associated with this method is $O(h^3)$. This method used the midpoint of an interval as a trial step, and as a result generated much smoother paths and more accurate results.

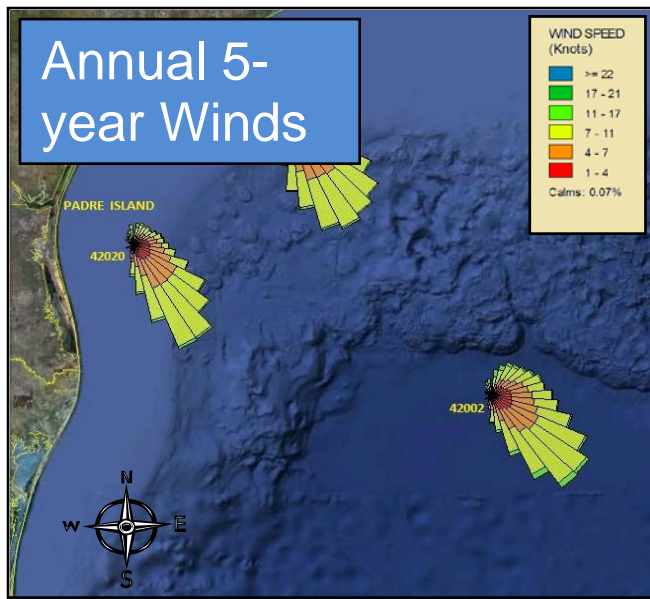


Figure 6. Five-year mean wind data from NDBC, processed using WR Plot software, exported as a .kml file and displayed using Google Earth.

Wind Data. The C++ program accepts the filename of the raw data file as well as the station ID for the observed buoy as user input. The program then proceeds to arrange the data into the Lakes Format as previously described. After arranging the data, it then writes the output to a new file. However, there are several nuances that are noteworthy. The raw data from NDBC breaks down the hour further into ten-minute intervals. As a result, those values were averaged to obtain a desired single value per hour. Unfortunately, the Lakes Format only accepts wind direction and wind speed as integer values. The program for this project therefore rounds the resultant averaged numbers to the nearest integer. While the overall effect this has is likely minimal, it should be noted that there is some amount of error involved in the final Lakes Format output.

CONCLUSIONS

Marine debris may negatively impact both human and marine habitats by affecting the aesthetic value of the beaches, creating water quality issues, and leading to the death of marine organisms. Debris on Padre Island National Seashore may come from many different sources, such as commercial fishing/shrimping, the oil and gas industry, recreational boaters, and from rivers that empty into the Gulf of Mexico. Regardless of the source, marine debris is an environmental issue and hazard that can directly affect coastal ecosystems and inhabitants. Understanding surface circulation in the Gulf of Mexico will help provide decision makers and communities additional information that can be used for the elimination and/or control of marine debris.

During the spring term, the DEVELOP team designed a methodology that was applied for the summer 2011 term. This methodology included the utilization of satellite altimeter and MODIS data, as well as various in-situ data. The methodology will help NOAA's Marine Debris Program and the Padre Island National Park Service improve upon marine debris monitoring, cleanup, and education efforts.

RADAR altimeter data provided a useful dataset for creating visual geospatial depictions of sea surface height and height anomaly, calculating geostrophic velocity, and predicting particle paths. The MODIS Sea Surface Temperature (SST) data proved useful for monitoring the Gulf Loop Current; however, during the summer months of 2010 the warm waters of Gulf of Mexico obscured the Loop Current and its associated eddies. Because sea surface temperatures in the Gulf of Mexico are universally warmer in summer months, MODIS SST data is only practical for monitoring the Loop Current in cooler months. Analysis of wind direction and wind speed data prove beneficial for understanding how marine debris is ultimately dispersed to the shoreline after eddies dissipate as they

interact with the continental shelf. Although wind is not the only force acting upon particles in a near-shore setting, it does play a key role in marine debris dispersal.

REFERENCES

Fry, D.M., Fefer, S.I., Sileo, L., 1987. Ingestion of plastic debris by Laysan albatross and wedge-tailed shearwaters in the Hawaiian Islands, *Marine Pollution Bulletin*, 18, 339–343.

Laist, D.W. 1987. Overview of the biological effects of lost and discarded plastic debris in the marine environment, *Marine Pollution Bulletin*, 18, 319–326.

Lakes Environmental Software. 1995-2011. WRPLOT View™ - Freeware: Wind rose plots for meteorological data. Available from <http://www.weblakes.com/products/wrplot/index.html>.

Leben, R.R., Born, G.H., and B.R. Engebret. 2002. Operational Altimeter Data Processing for Mesoscale Monitoring, *Marine Geodesy*, 25, 3-18.

Lee, J. 2009. The economic significance of tourism and nature tourism in Corpus Christi, Report, Corpus Christi Convention Center and Visitors Bureau, Corpus Christi, TX-USA.

Marshall, J., Plumb, A., and L. Illari. 2003. Geostrophic balance. *Weather* 1, 1-7.

National Aeronautics and Space Administration. 2011. OceanColor Web. <http://oceancolor.gsfc.nasa.gov/>. Updated July 15th, 2011.

National Park Service. 2005a. Padre Island: Administrative history. Chapter One: Introduction. Retrieved from http://www.cr.nps.gov/history/online_books/pais/adhi1.htm on August 23rd, 2011. Updated June 14th, 2005.

National Park Service. 2005b. Padre Island: Administrative history. Chapter Eight: Natural resource issues. Retrieved from http://www.cr.nps.gov/history/online_books/pais/adhi8.htm on August 23rd, 2011. Updated June 14th, 2005.

National Park Service. 2008. Padre Island National Seashore: Shoreline trash. Retrieved from <http://www.nps.gov/pais/naturescience/shoreline-trash.htm> on August 23rd, 2011. Updated December 31st, 2008.

National Park Service. 2011a. Padre Island National Seashore: Birds. Retrieved from <http://www.nps.gov/pais/naturescience/birds.htm> on August 23rd, 2011. Updated June 2nd, 2011.

National Park Service. 2011b. Padre Island National Seashore, Texas. Retrieved from <http://www.nps.gov/pais/index.htm> on August 23rd, 2011. Updated August 18th, 2011.

National Oceanic and Atmospheric Administration. 2009. National Data Buoy Center: NDBC General Information. <http://www.ndbc.noaa.gov/ndbc.shtml#Org>. Updated July 2nd, 2009.

National Oceanic and Atmospheric Administration. 2010. National Data Buoy Center historical data. <http://www.ndbc.noaa.gov/hmd.shtml>. Updated February 3rd, 2010.

National Oceanic and Atmospheric Administration Marine Debris Program. 2011. Marine Debris Research, Prevention, and Reduction Act of 2006. Retrieved August 23rd, 2011 from <http://marinedebris.noaa.gov/about/act.html>. Updated July 28th, 2011.

- Ryan, P.G. 1990. The effects of ingested plastic and other marine debris on seabirds. pp. 623-634 *in*: R.S. Shomura and M.L. Godfrey (eds.), Proceedings of the Second International Conference on Marine Debris, April 2-7, 1989. Honolulu, Hawaii. U.S. Dep. Commer., NOAA Tech. Memo. NMFS, NOAA-TM-NMFS-SWFC-154.
- Sheavly, S.B. and K.M. Register. 2007. Marine Debris & Plastics: Environmental concerns, sources, impacts and solutions, *J. Polymer Environmental*, 15: 301-305. doi:10.1007/s10924-007-0074-3.
- Weisstein, Eric W. "Euler Forward Method." From *MathWorld*--A Wolfram Web Resource. <http://mathworld.wolfram.com/EulerForwardMethod.html>.




Ross Reahard (University of New Orleans), Brandie Mitchell (University of New Orleans), Lucas Lee (University of Southern Mississippi), Blaise Pezold (University of New Orleans), Chris Brooks (Pearl River Community College), Candis Mallett (University of Southern Mississippi), Shelby Barrett (William Carey University), and Aaron Albin (Southeastern Louisiana University)
NASA DEVELOP Program, John C. Stennis Space Center, Mississippi

OBJECTIVES

- Improve spatial-temporal understanding of the Loop Current and its associated eddies, as well as their effects on marine debris trajectories and dispersal to coastal areas
- Analyze debris accumulation patterns on Padre Island, Texas
- Understand which critical marine habitats may be affected by marine debris pollution
- Demonstrate the usefulness of satellite altimeter data and MODIS SST data in monitoring mesoscale marine surface circulation processes

PROJECT PARTNERS



NASA EOS UTILIZED




ACKNOWLEDGEMENTS

Joe Spruce – CSC, Stennis Space Center
Dr. Kenton Ross – SSAI
Dr. Robert Leben – University of Colorado
Neal Parry – NOAA Marine Debris Division
William Botts – Education Coordinator, PINS
Gabriel LoDolce – University of Colorado
Cheri Miller – DEVELOP Southeast Region Coordinator
Jason Jones – DEVELOP National Program

ABSTRACT

The goal of this project was to apply satellite data to model surface circulation in the Gulf of Mexico as a means to aid in the monitoring of marine debris dispersal and the regulation of marine debris practices. Marine debris is a persistent problem for coastal areas throughout the world. In the Gulf of Mexico, the Loop Current flows north through the Yucatan Channel, loops east, then south, exiting through the Florida Straits. Clockwise-rotating areas of warm water, known as eddies, periodically separate from the Loop Current. These eddies have the potential to trap and transport debris onto shores, such as the Padre Island National Seashore. The latter is a 68 mile long barrier island beach in southeastern Texas and is the longest undeveloped beach in the world. This naturally formed beach can accumulate up to one ton of marine debris per linear mile. This project used sea surface height and height anomaly data based on NASA RADAR altimeter satellites TOPEX/Poseidon, Jason 1, and Jason 2; as well as European RADAR altimeters onboard ERS-1, ERS-2 (European Remote Sensing Satellite), and ENVISAT (Environmental Satellite). This project also employed MODIS sea surface temperature (SST) data to aid in monitoring and visualizing the Loop Current. The sea surface height and height anomaly data were processed to calculate geostrophic flow velocities and predict particle paths. This research provided NOAA's Marine Debris Program and the Padre Island National Seashore with a better understanding of how the Loop Current and surface circulation patterns disperse marine debris to the region. A methodology to monitor Gulf of Mexico surface circulation and predict particle paths by using RADAR altimeter data were provided to partnering agencies. The project provided maps of debris trajectories and geostrophic currents that demonstrate the usefulness of satellite altimetry data to monitor oceanographic processes which in turn affect the distribution of marine debris.


METHODOLOGY

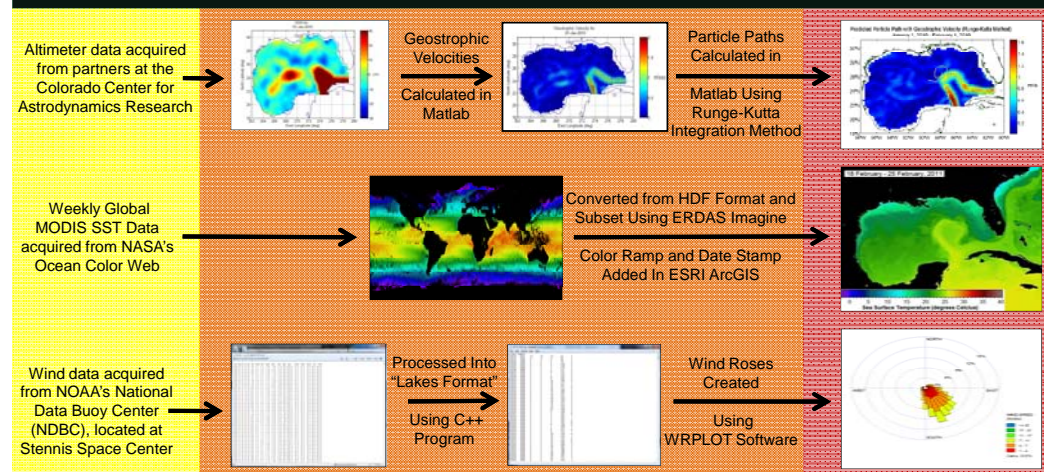

RESULTS CONTINUED



A 1994 - 1995 study conducted by the Minerals Management Service and National Park Service collected and catalogued 63,410 debris items from PINS. The commercial fishing/shrimping industry and the oil and gas industry were identified as the two largest contributors to marine debris on PINS.

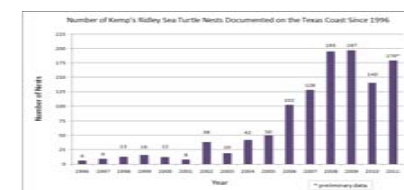


CONCLUSIONS

- Satellite altimeter data from multiple sources enabled geospatial maps of sea surface height, geostrophic velocity, and particle path predictions to be produced.
- MODIS SST data provided a means to monitor the position of the loop current; however, this method is not useful in the warmer summer months.
- Particle path predictions on surface waters can be accurately represented using the Runge-Kutta integration method and tri-cubic interpolation.
- Wind data from NDBC buoys provided useful information for inferring the dispersal of marine debris as it nears the coast.
- Marine Debris may negatively impact critical habitat for many endangered and threatened species, such as the Kemp's ridley sea turtle.


RESULTS



Produced from June 10, 2011 Landsat imagery

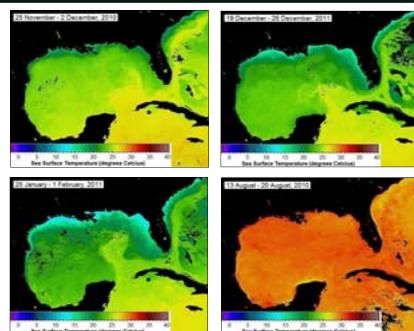

MODIS SST data used to monitor the Loop Current. During the summer months, warmer Gulf temperatures prevent the differentiation between the warm Loop Current and ambient Gulf waters.

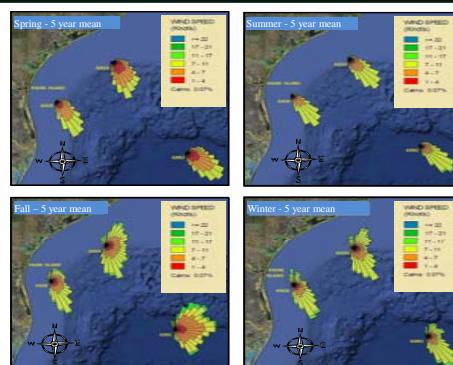

Because wind direction is a contributing factor to near-shore marine debris dispersal, wind roses are useful in understanding wind patterns and their potential effect on marine debris trajectories. Data source: NOAA NDBC





Image output from Matlab showing predicted particle path (yellow line) overlain on geostrophic velocities base map. Produced from blended RADAR altimeter data.



Same particle path prediction exported from Matlab as a shapefile and displayed over oil rig location and bathymetry map using ESRI ArcGIS

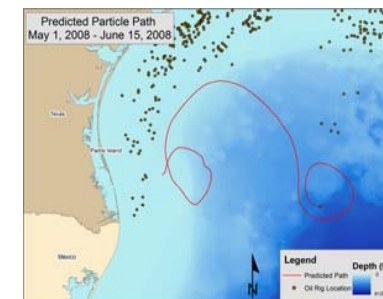


Spaceborne Sensors Track Marine Debris Circulation in the Gulf of Mexico

NASA Stennis Space Center
November 17, 2011

Team Members:

Ross Reahard – University of New Orleans
Brandie Mitchell – University of New Orleans
Lucas Lee – University of Southern Mississippi
Blaise Pezold – University of New Orleans
Chris Brooks – Pearl River Community College
Aaron Albin – Southeastern Louisiana University
Candis Mallett – University of Southern Mississippi
Shelby Barrett – William Carey University

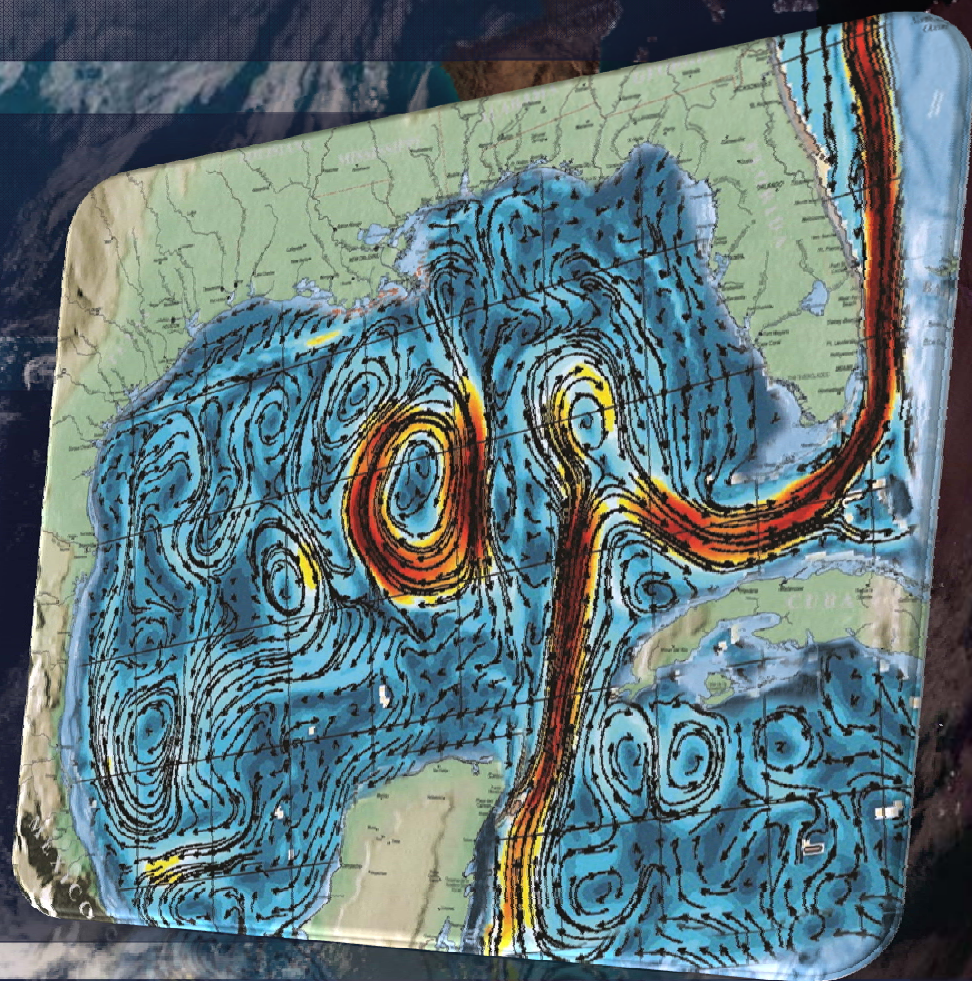

Community Concerns


- Ecotourism is the fastest growing segment of the Texas Gulf Coast's tourism-based economy. Marine debris can negatively affect the ecotourism industry, in turn affecting the Texas economy (Lee, 2009).
- Within the Coastal Bend Area of Texas, ecotourism employs 8,748 citizens and provides \$233.5 M in household earnings (Lee, 2009).
- Padre Island National Seashore (PINS) is a critical part of the Central Flyway, a major migratory route for 380 species of migratory birds (13 threatened or endangered) (www.nps.gov). Marine debris threatens this vital avian habitat.



Community Concerns

- Marine debris also threatens habitat of the highly endangered Kemp's ridley sea turtle. PINS is one of only two remaining global nesting sites for this species. Between 1996 and 2010, PINS' Kemp's ridley nests grew from 6 to 140 confirmed nests. (www.nps.gov)

Number of Kemp's Ridley Sea Turtle Nests Documented on the Texas Coast Since 1996

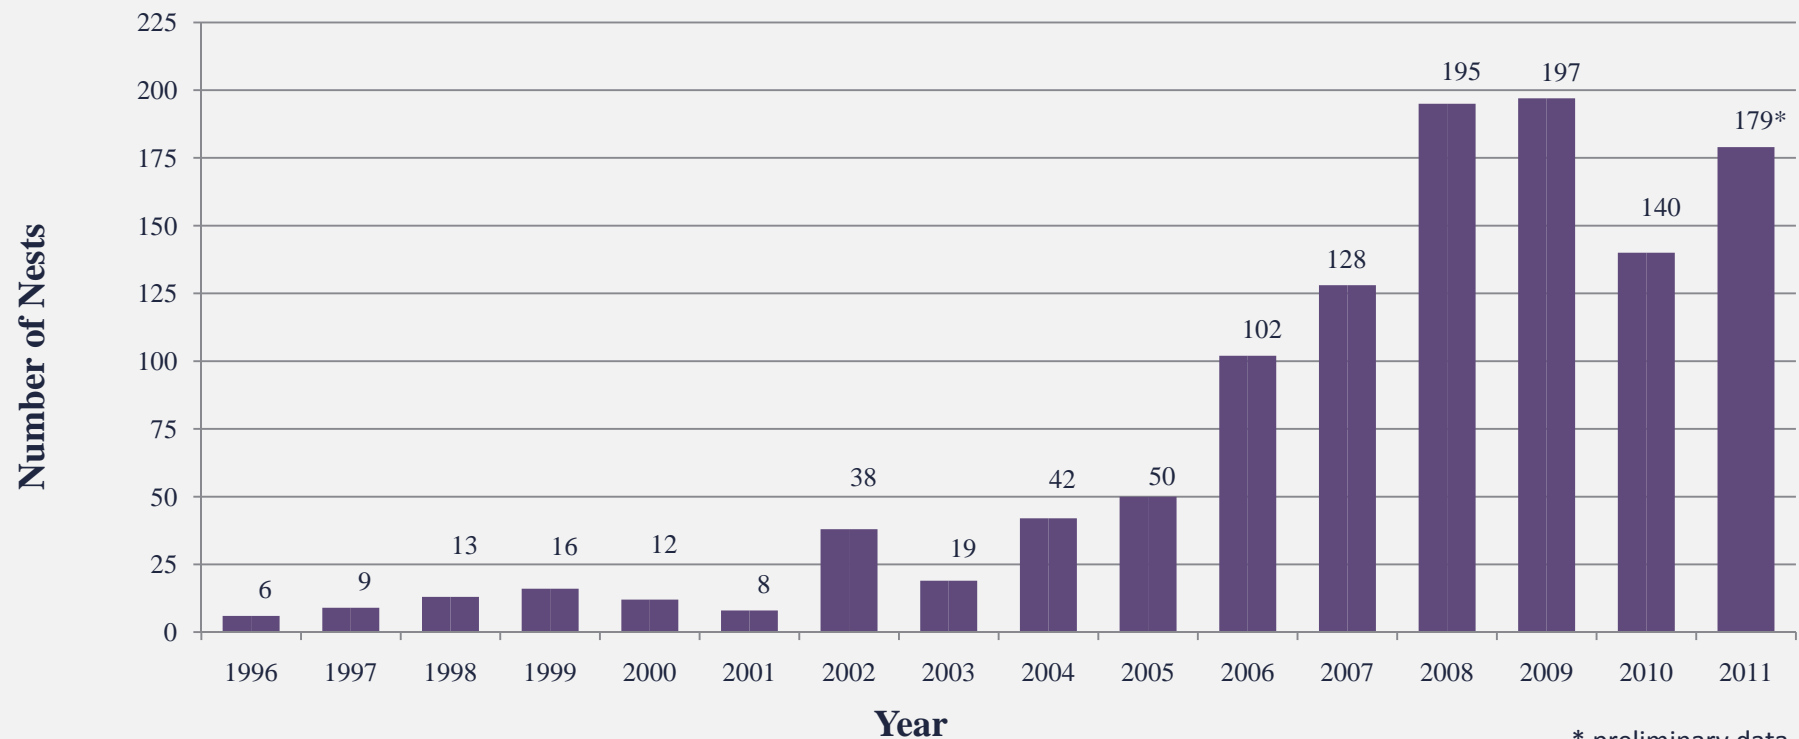

* preliminary data

Partners / Collaborators

- National Park Service
- NOAA Marine Debris Program
- Padre Island National Seashore (PINS)
- University of Colorado –
Center for Astrodynamics Research

Science Advisors

Joe Spruce
CSC, Stennis Space Center

Dr. Kenton Ross
SSAI

Dr. Robert Leben
University of Colorado
Center for Astrodynamics Research

Collaborators

Neal Parry
GoM Regional Coordinator
NOAA Marine Debris Program

William Botts
Education Coordinator - PINS

National Park Service
U.S. Department of the Interior



Padre Island

National Seashore



University of Colorado


BOULDER

Colorado Center for Astrodynamics Research (CCAR)

Partner Needs

- Visual geospatial animations to convey sources and mechanisms of dispersal to enhance marine debris regulation, enforcement and education
- An improved method to monitor the Gulf of Mexico Loop Current and marine debris trajectories as well as predict debris particle transport paths

Loop Current
Altimetry

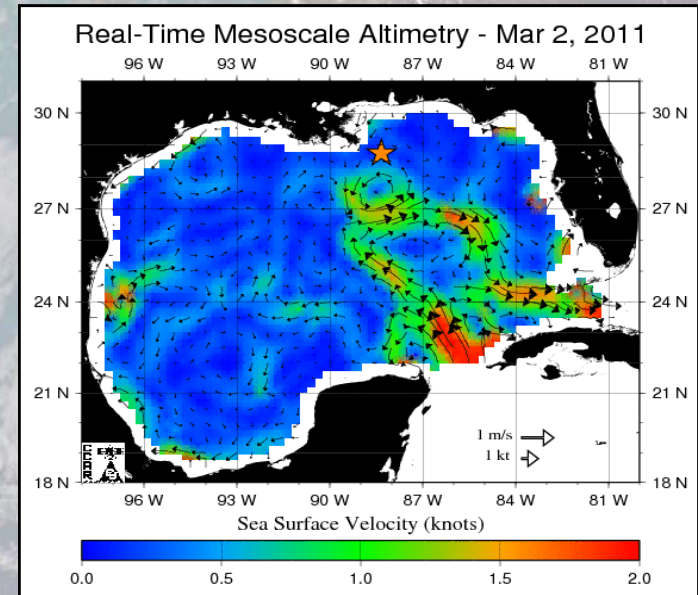

MASE
Wave Model

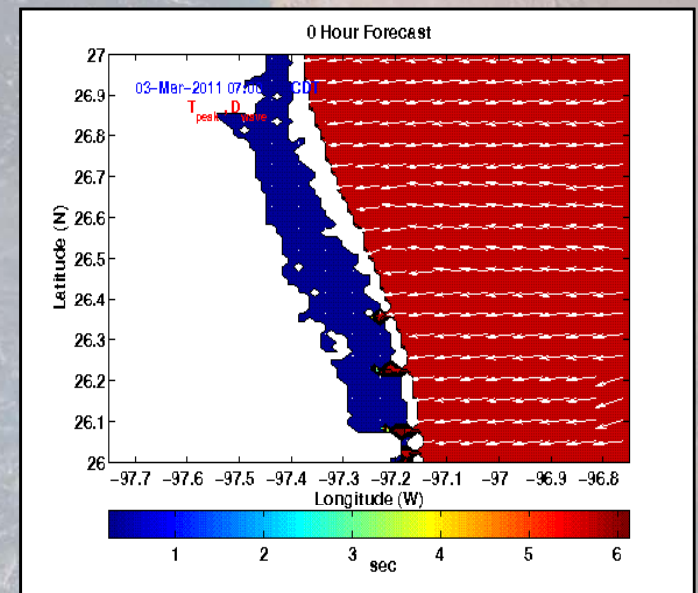


Photo credit: PINS



Photo credit: NOAA

Study Area

- **Study Area – Gulf of Mexico & Padre Island, Texas**



Study Area Ecosystems




Left: Padre Island General Land Cover Map
Produced from June 10, 2010 Landsat Imagery



Above: Padre Island National Seashore Ecosystems
Photographs Credit: National Park Service

Potential Sources of Marine Debris

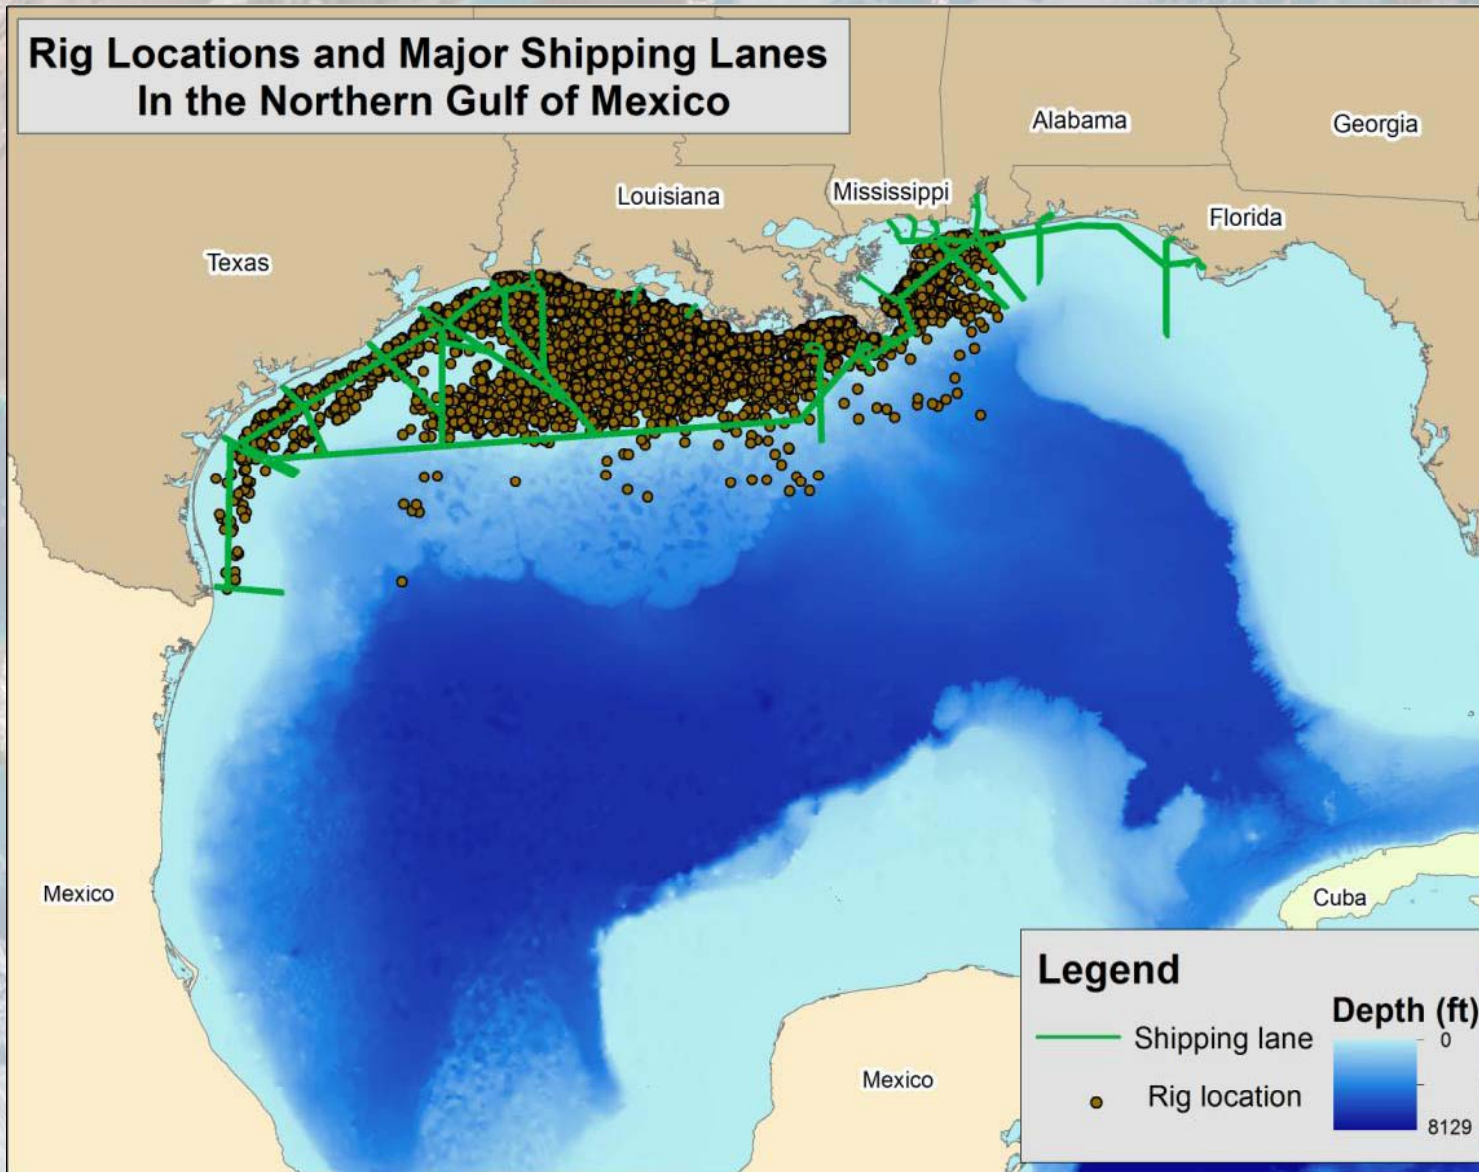


A 1994-1995 study conducted by the Minerals Management Service and National Park Service collected and cataloged 63,410 debris items from PINS. The commercial fishing/shrimping industry and the oil and gas industry were identified as the two largest contributors.

Project Methodology

- **Sea surface temperature data utilized:**
 - MODIS onboard *Aqua* and *Terra*
 - Subset and converted from HDF format in ERDAS Imagine
 - Color ramp added in ArcGIS
- **Satellite altimeter data utilized:**


Acquired from Colorado Center for Astrodynamics Research, Used to Calculate Daily Sea Surface Height

 - TOPEX/Poseidon
 - Jason 1
 - Jason 2
 - ERS 1
 - ERS 2
 - Envisat

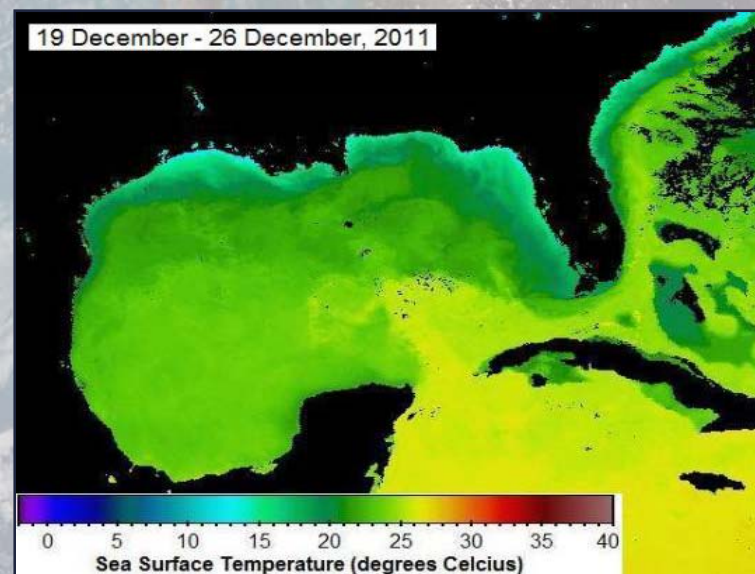

Project Methodology


Data acquired from the Colorado Center for Astrodynamics Research

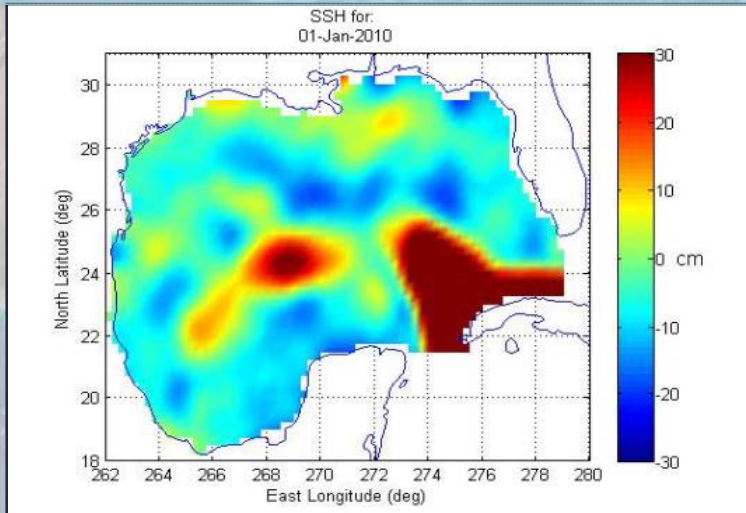

Sea Surface Height (SSH) Calculated Using Blended Satellite Altimeter Data


Altimeter Data
Processed
in Matlab

Geostrophic Velocity

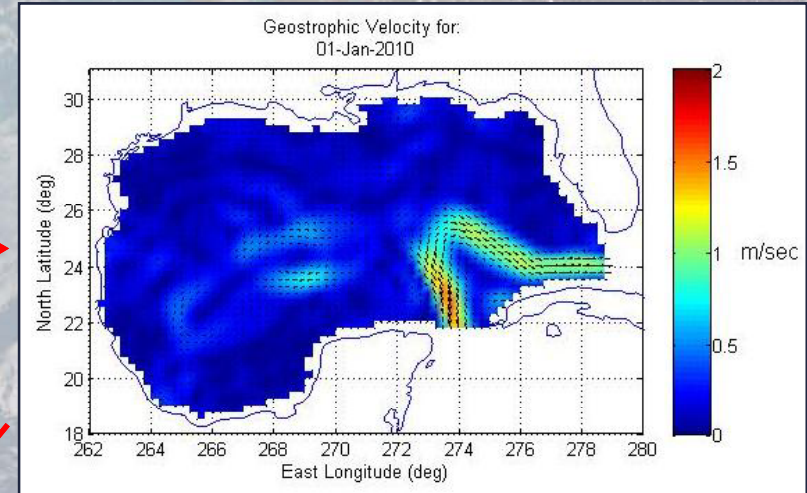

Calculated as a Balance of the Horizontal Pressure Gradient and the Coriolis Effect


Particle Path Calculated by Integrating Over Time and Space Using the Runge-Kutta Integration Method

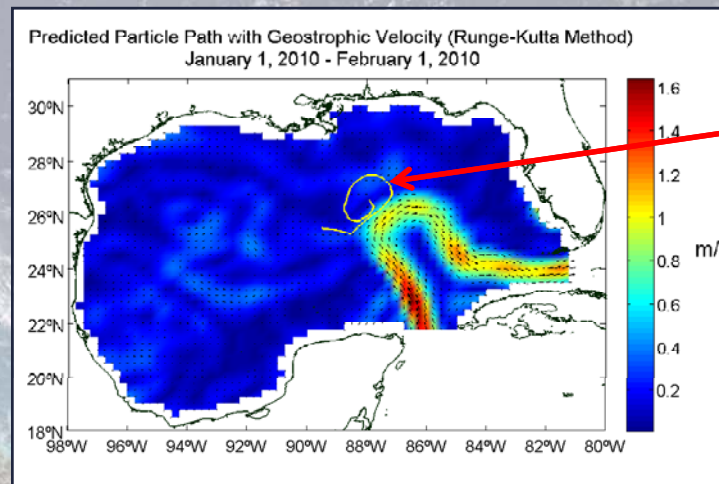



Particle Path

Project Methodology

Updated Matlab code from the Colorado Center for Astroynamics Research outputs a series of images showing the particle's movement per day with sea surface height, serving as a basis for our tracking system.

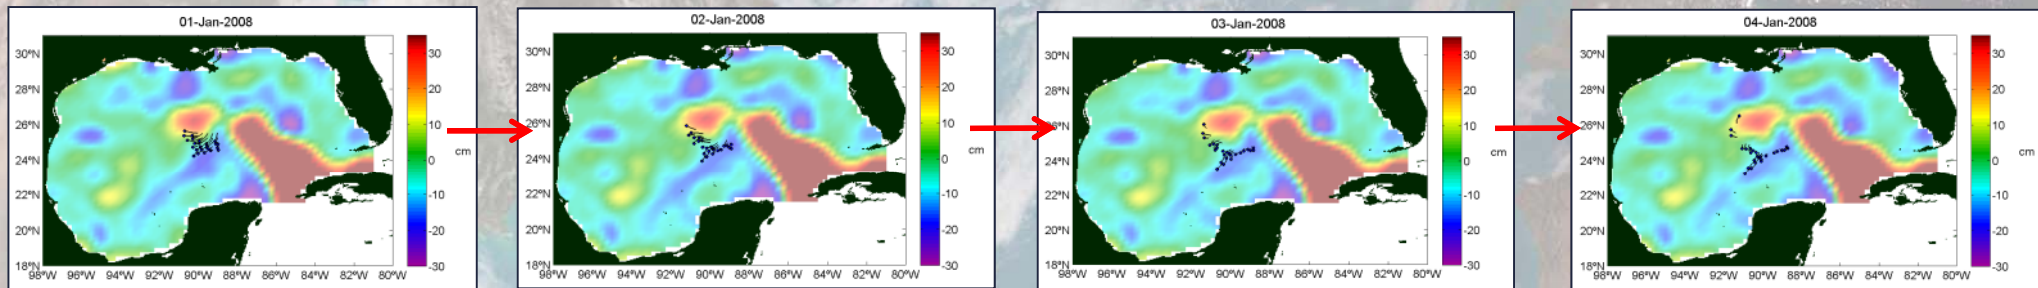


Modifications were made to output the particle paths into a single image with geostrophic velocity as well as a shapefile to be displayed using ArcGIS

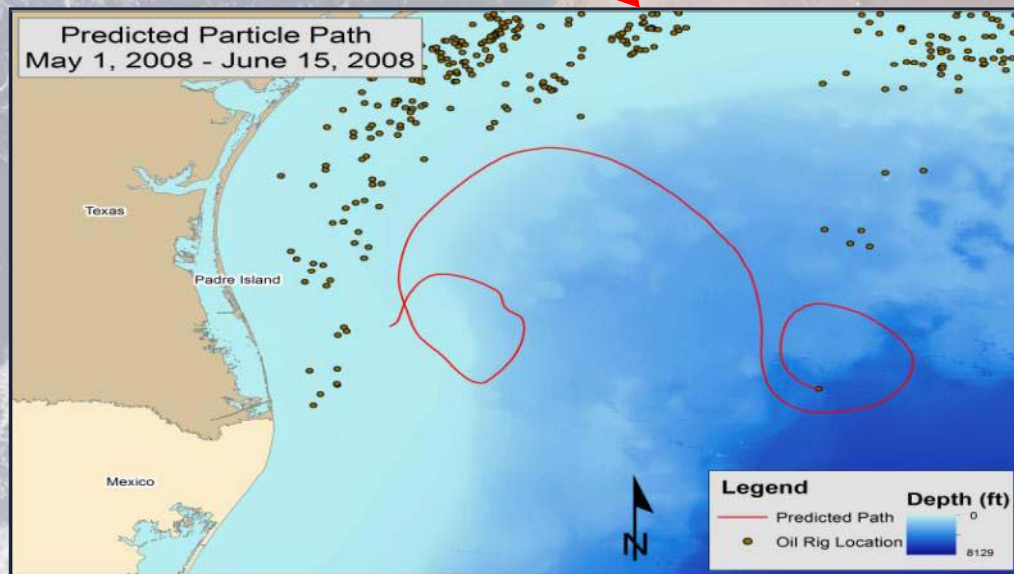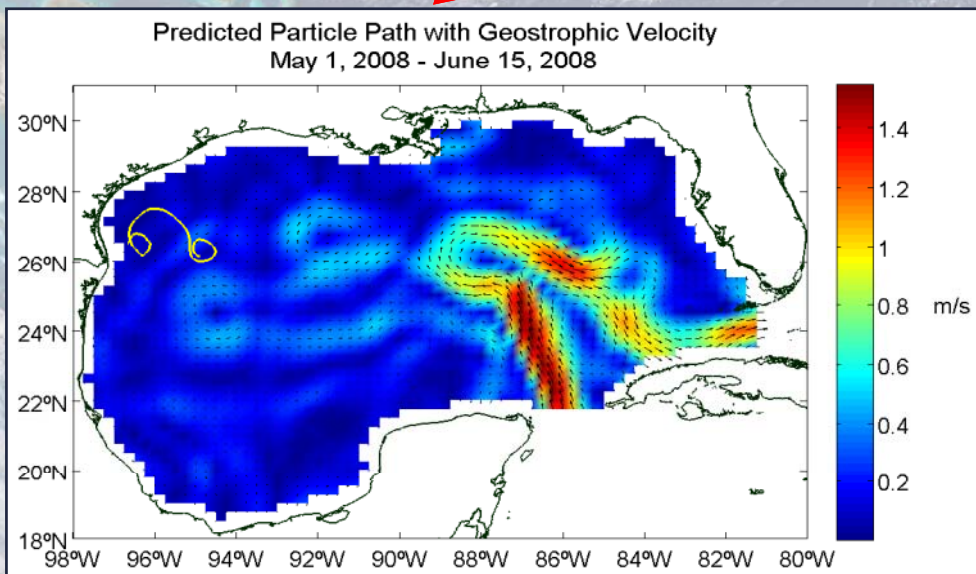


Project Methodology

Comparison of the Implementation of Euler and Runge-Kutta Integration Methods

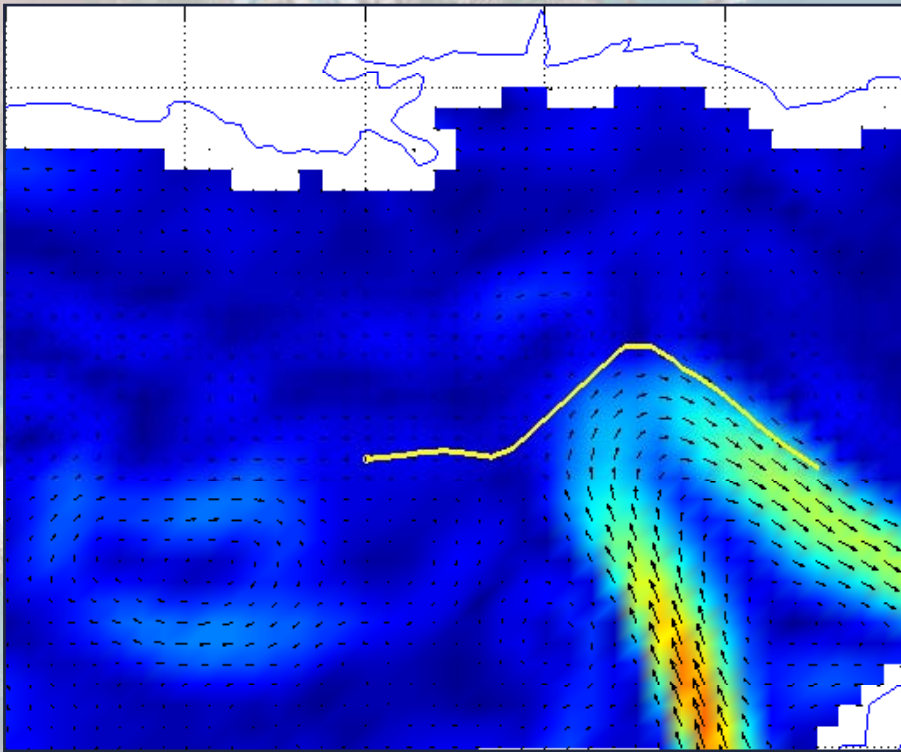

Particle Path Prediction Using the Euler Integration Method for January 15, 2010. In this case, the prediction is not an accurate representation of what typically happens in reality.

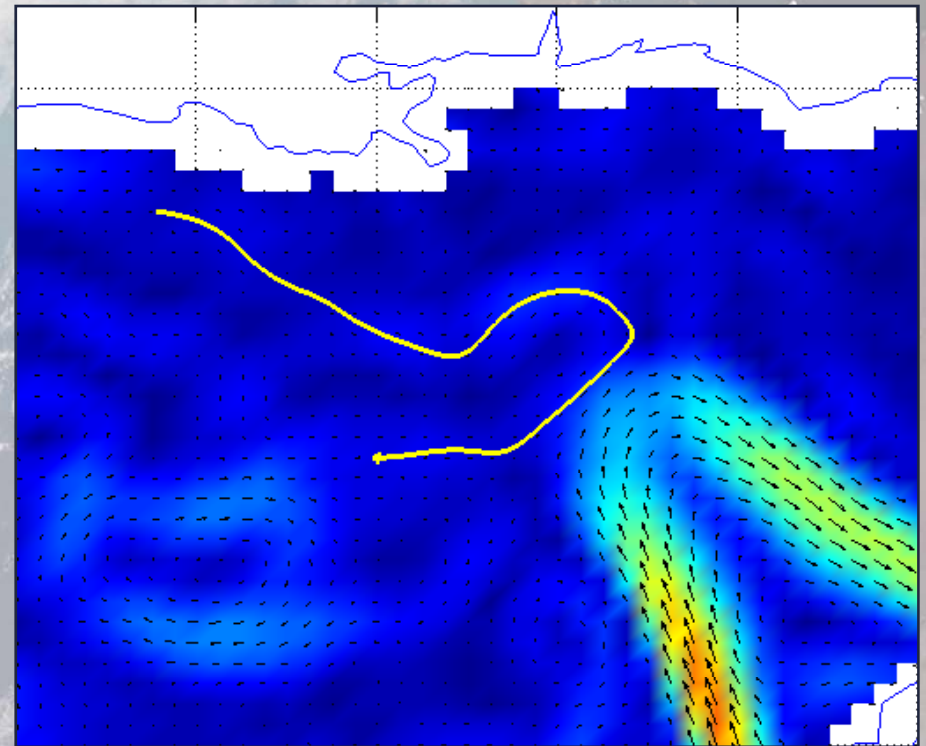


Particle Path Calculated by Using the Runge-Kutta Integration Method for January 15, 2010. This is a more accurate prediction.


Project Methodology

Data acquired from the National Data Buoy Center-Historical Marine Data


Lakes Format

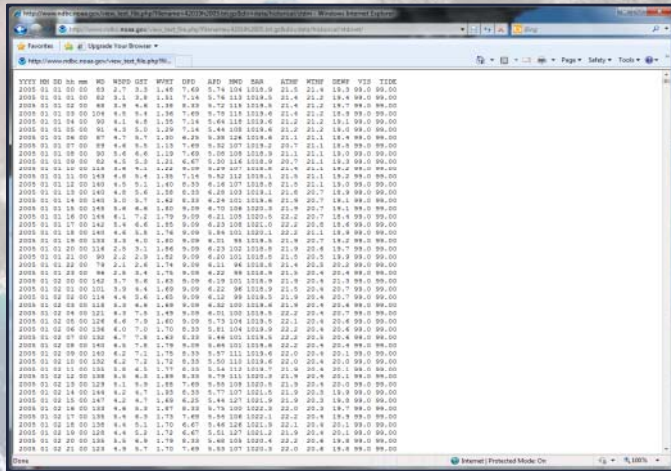

Data processed using C++ into readable Lakes Format

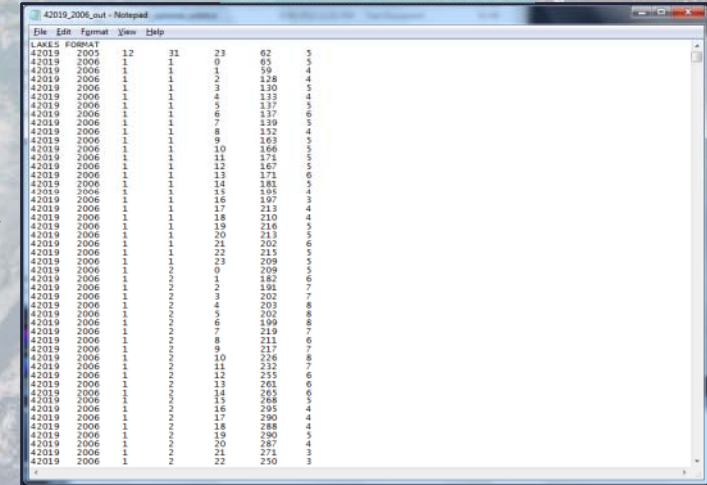


WRPLOT Program

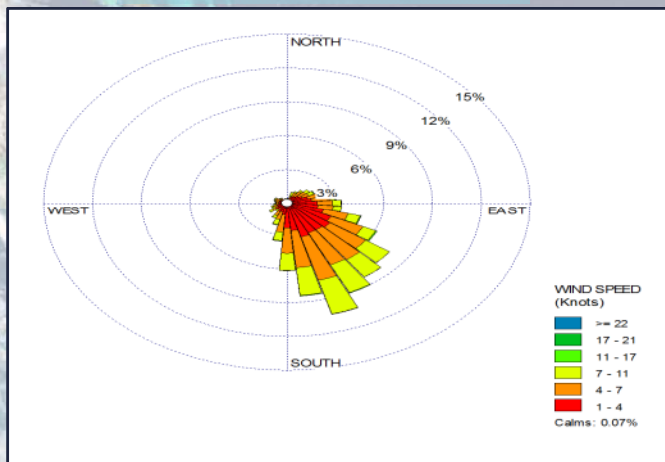

A wind rose was created using the WRPLOT program.

Data exported for analysis

Displayed Using Google Earth




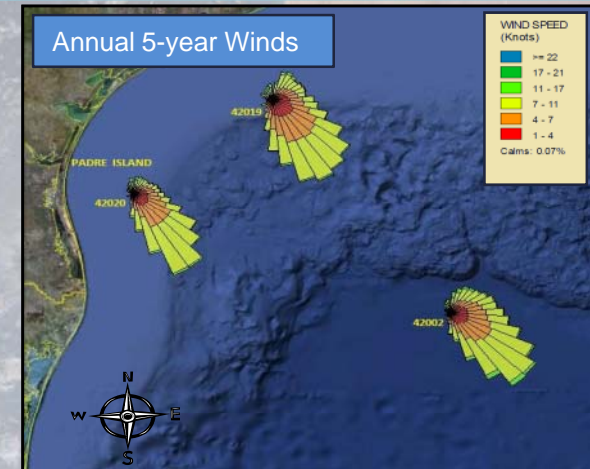


Wind data analyzed for near-shore locations


Results – MODIS SST

- Because the Loop Current is a warm water current, it can be monitored using SST data.

- During the summer months, this method has limited utility in monitoring the Loop Current.

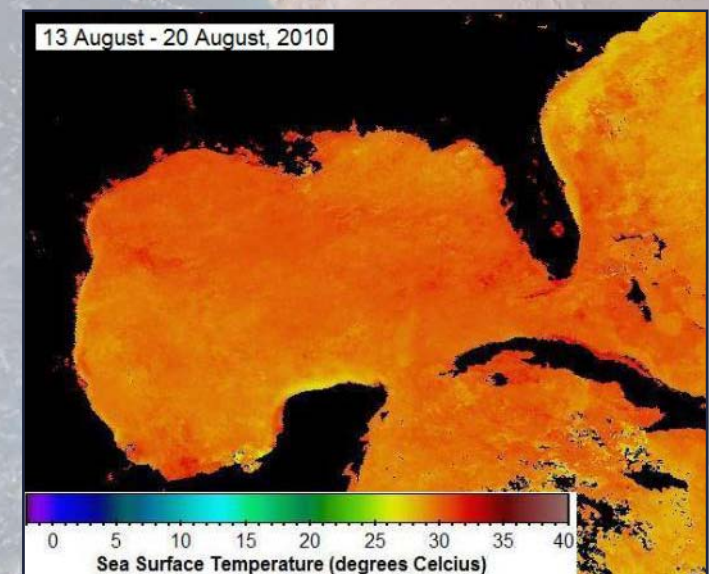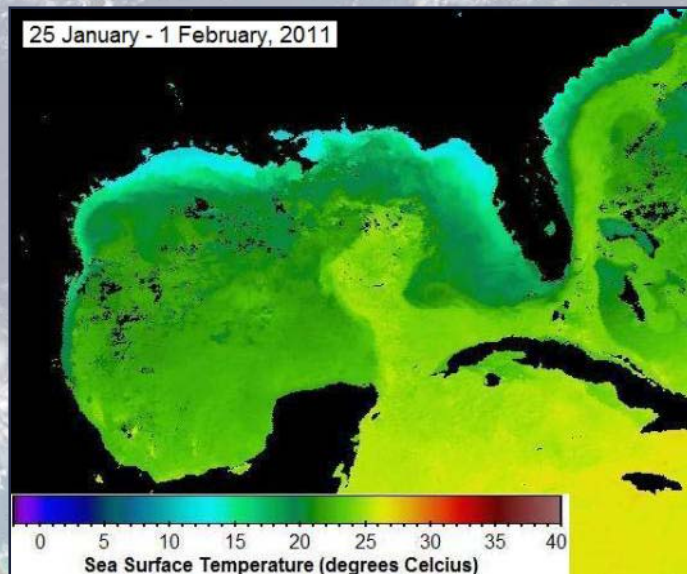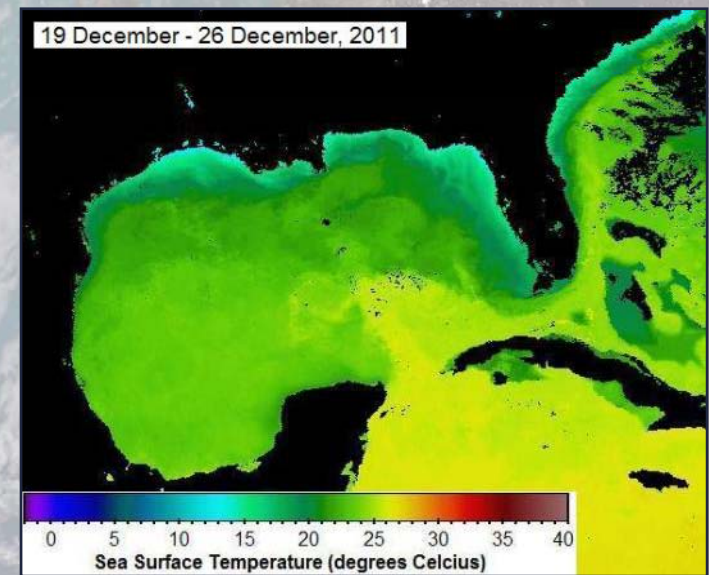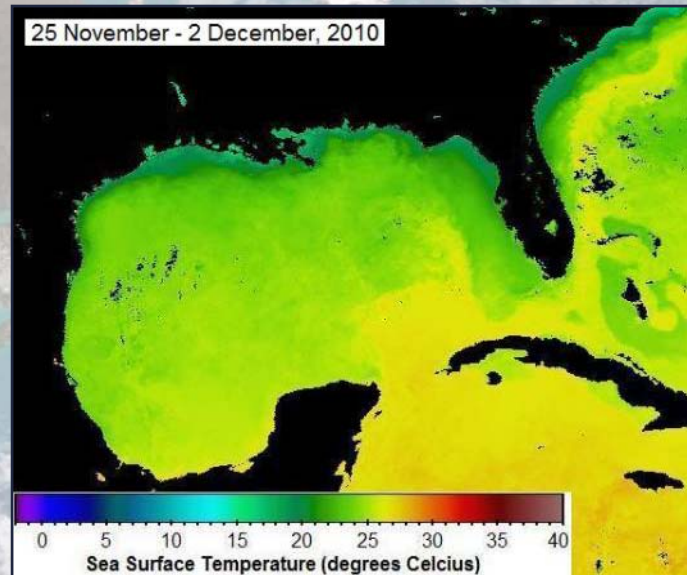

Results – MODIS SST

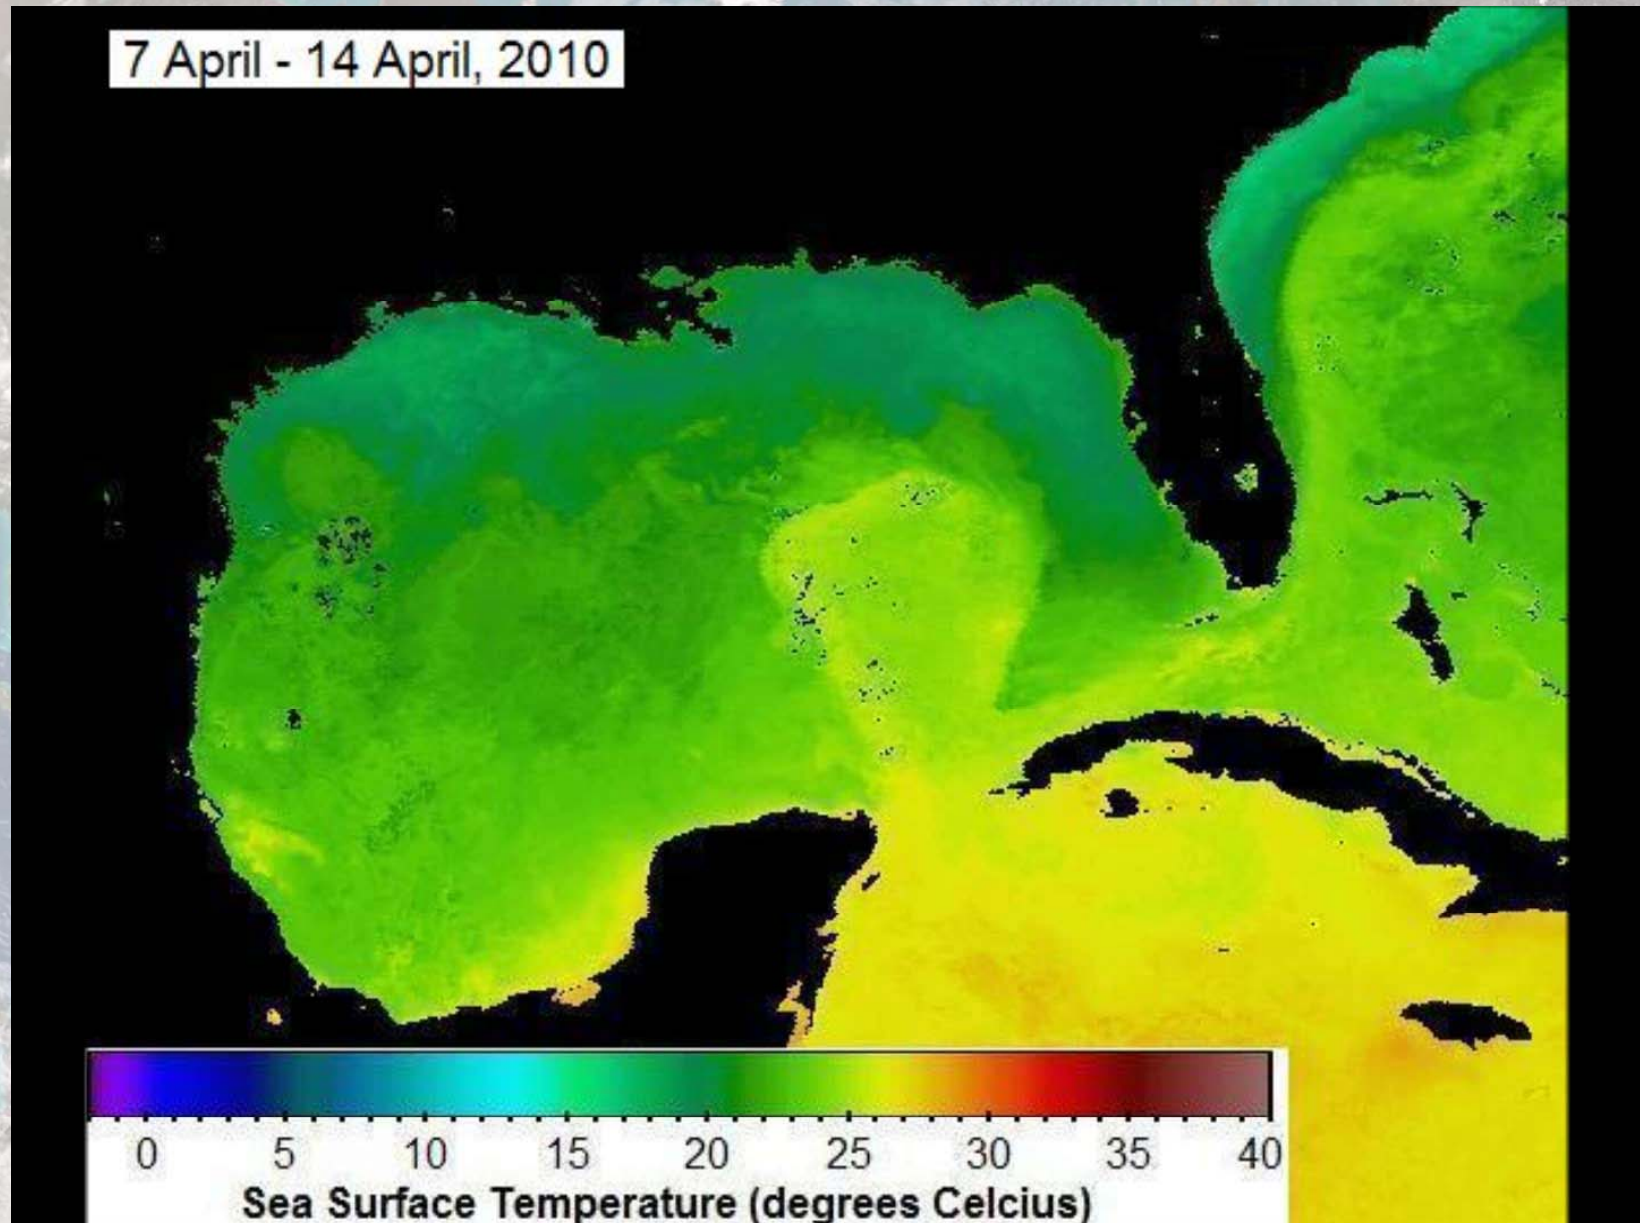

Results – RADAR Altimetry


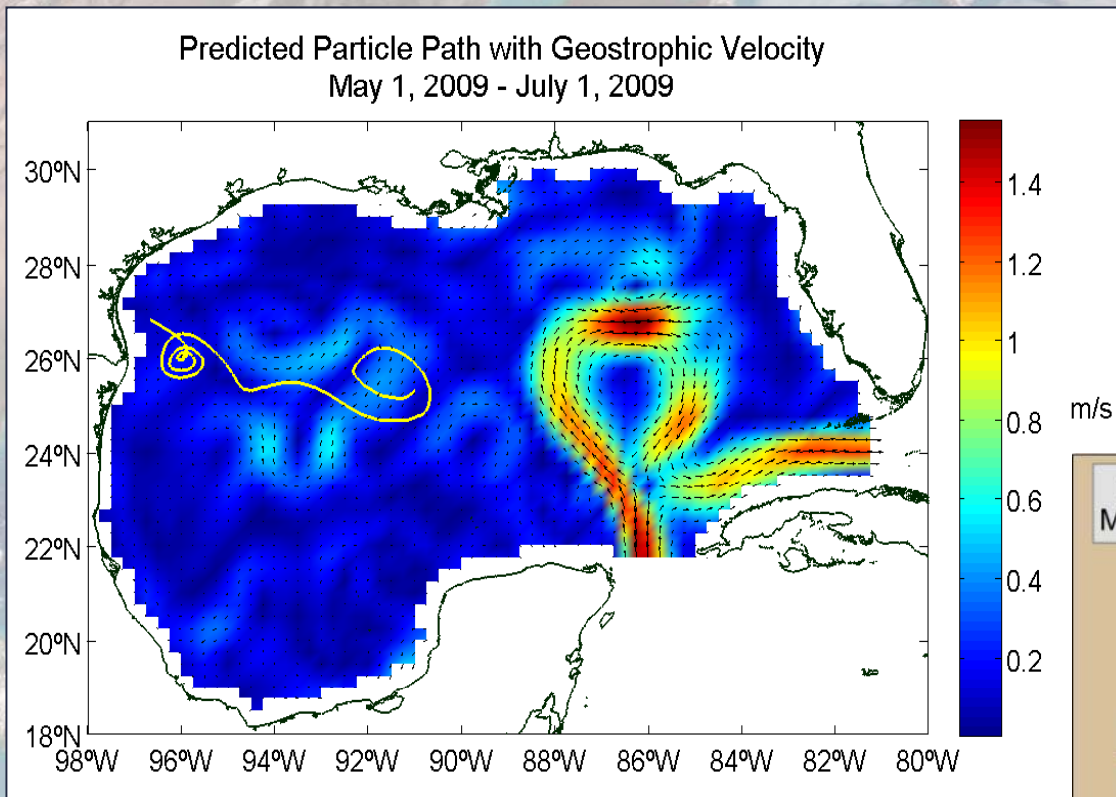


Image output from Matlab
showing predicted particle
path overlain on geostrophic
velocities base map

Same particle path prediction
exported from Matlab as a shapefile
and displayed over oil rig location and
bathymetry map using ESRI ArcGIS

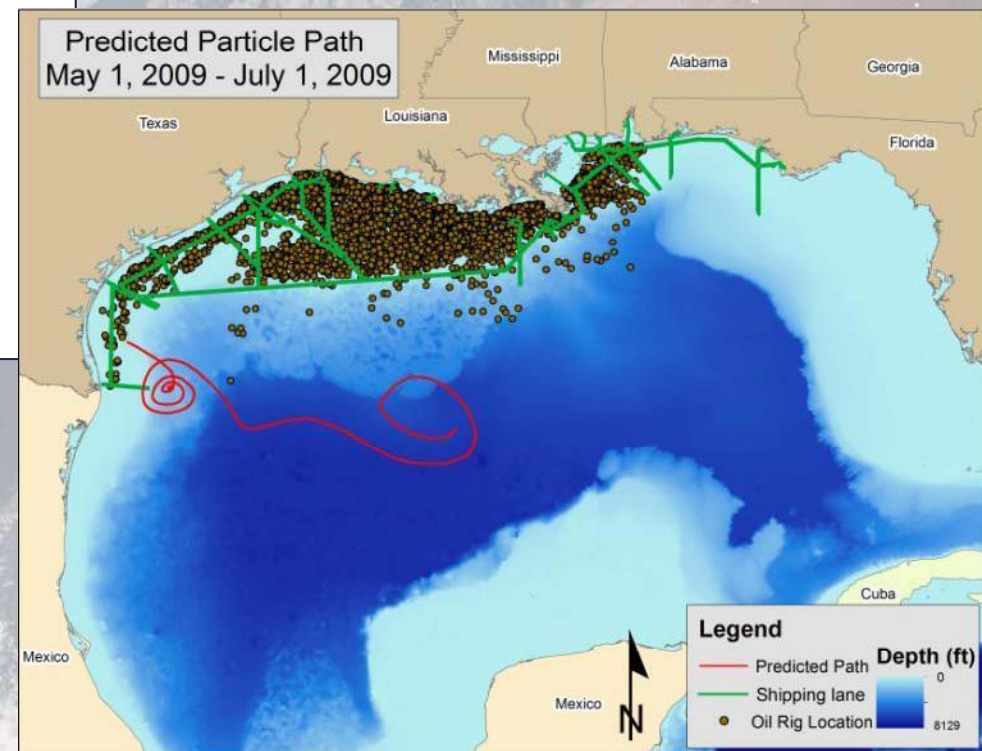

Results – RADAR Altimetry

A cluster of particles were initially placed near known oil and gas infrastructure. Foretracking analysis was performed to determine the possible dispersal and locations of these particles. The initial particles in Figure 1 were traced for a 60 day period. This procedure was done for each day in January, 2008, and the cumulative results are shown in Figure 2.

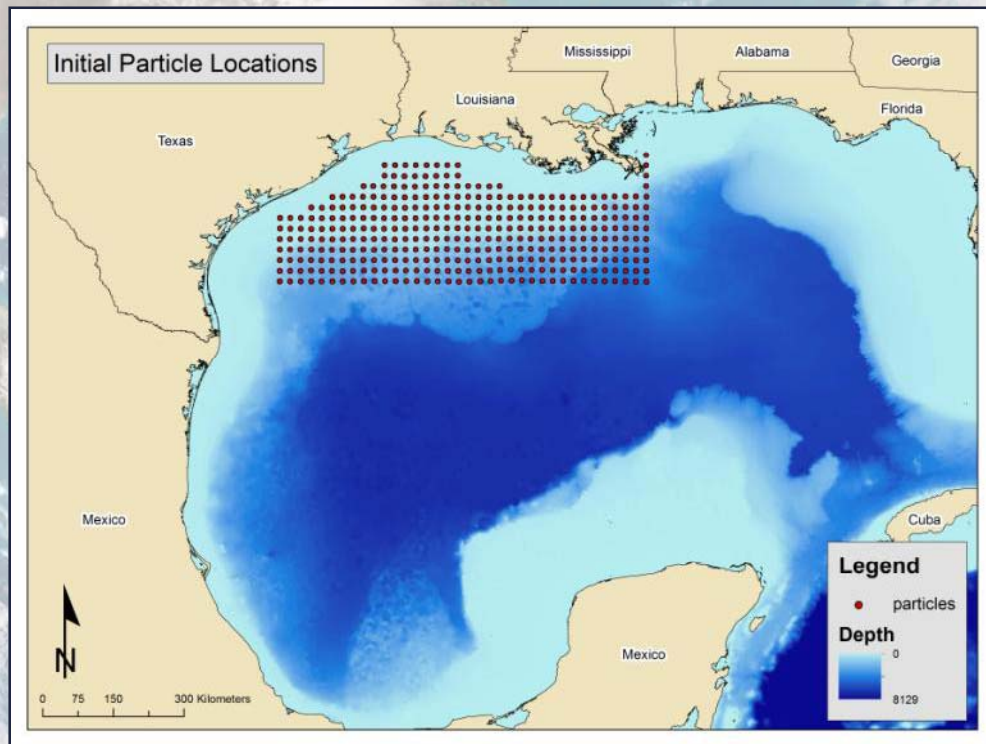


Figure 1: 404 particles were initially placed near the oil and gas fields.

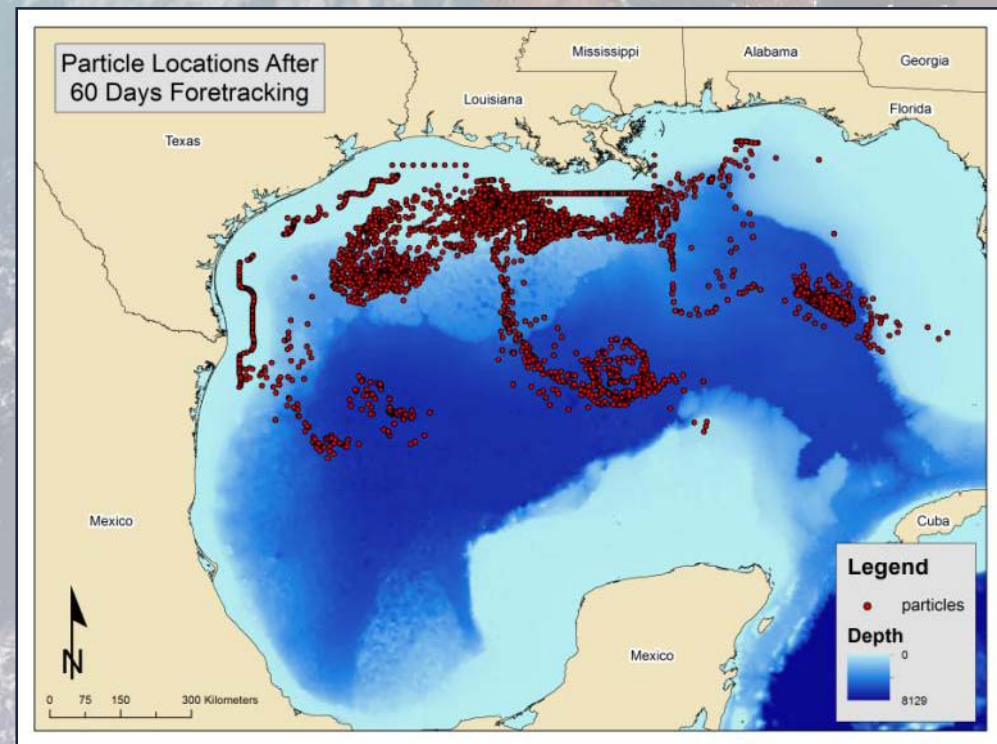


Figure 2: Resulting particle positions after 60 days foretracking

Results – RADAR Altimetry

Particle backtracking was performed in order to gain a better understanding of where debris on PINS may have originated. Below, the initial particle positions shown in Figure 1 were traced back for a period of 60 days. This backtracking was done for each day in the month of January 2010, and the collective resulting particle positions are shown in Figure 2.

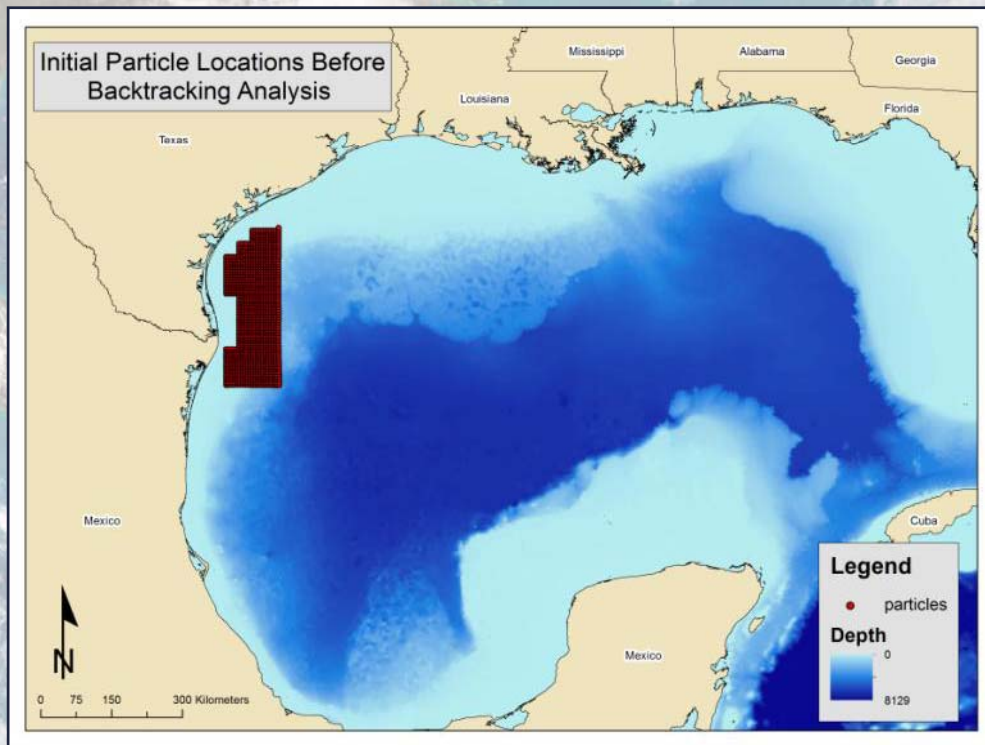


Figure 1: 1276 particles were initially placed near Padre Island, Texas.


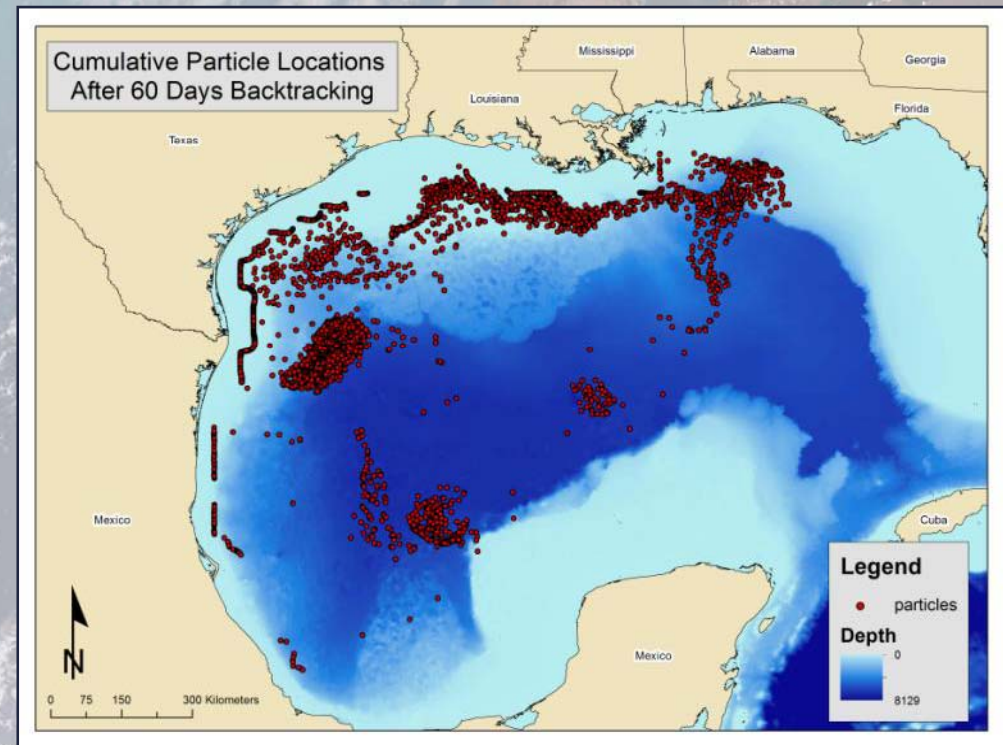



Figure 2: Resulting particle positions from backtracking analysis

Results – Wind Data


- This image depicts annual winds for each buoy, over the last 5 years of available data.
- Winds are shown in the “blowing from” direction. For example, buoys 42020 & 42019 show a dominant SSE wind, while buoy 42002 shows a dominant SE wind.
- Near-shore wind direction is a contributing factor affecting how debris is transported once an eddy reaches the continental shelf and has dissipated.

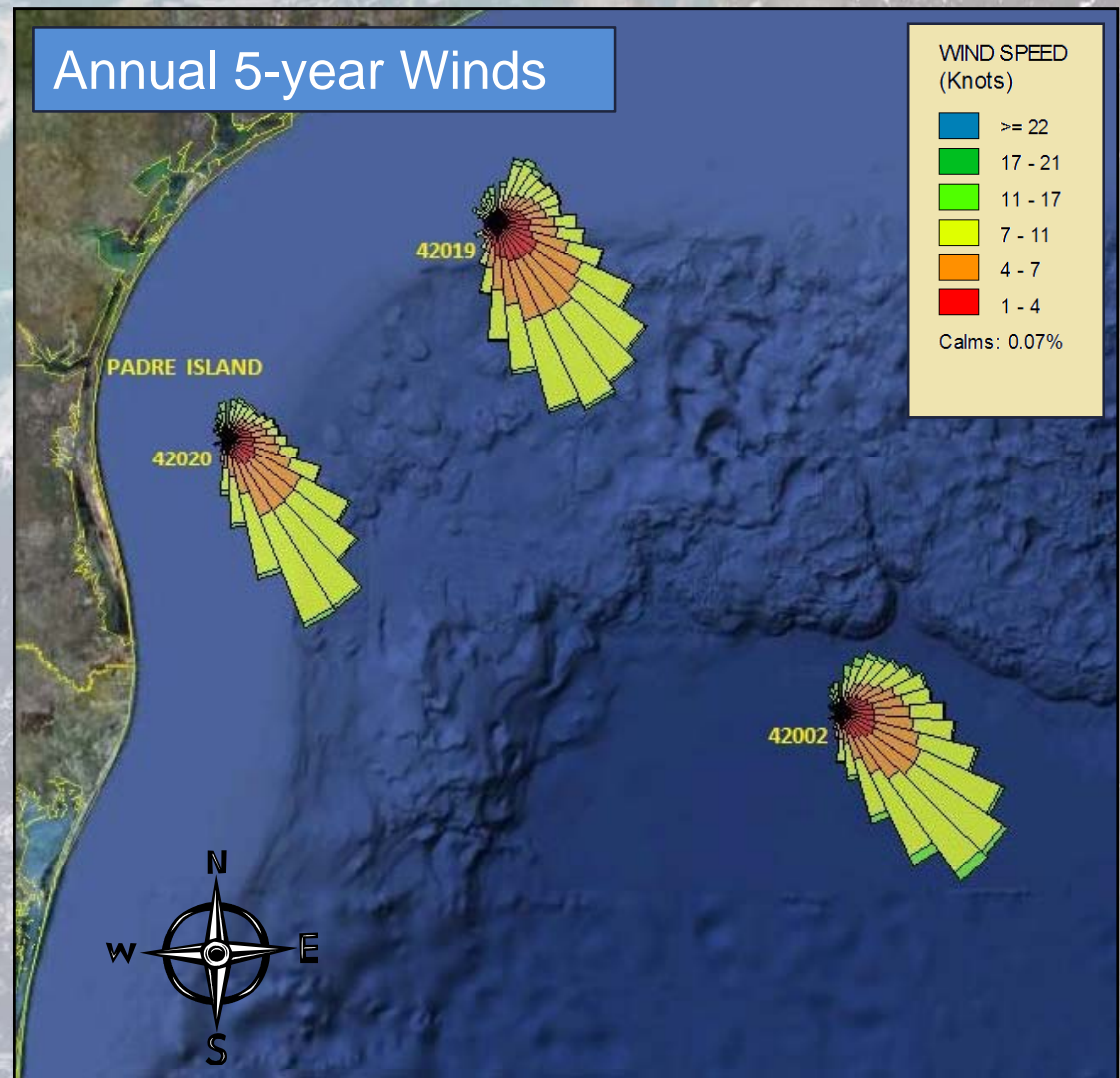

Results – Wind Data

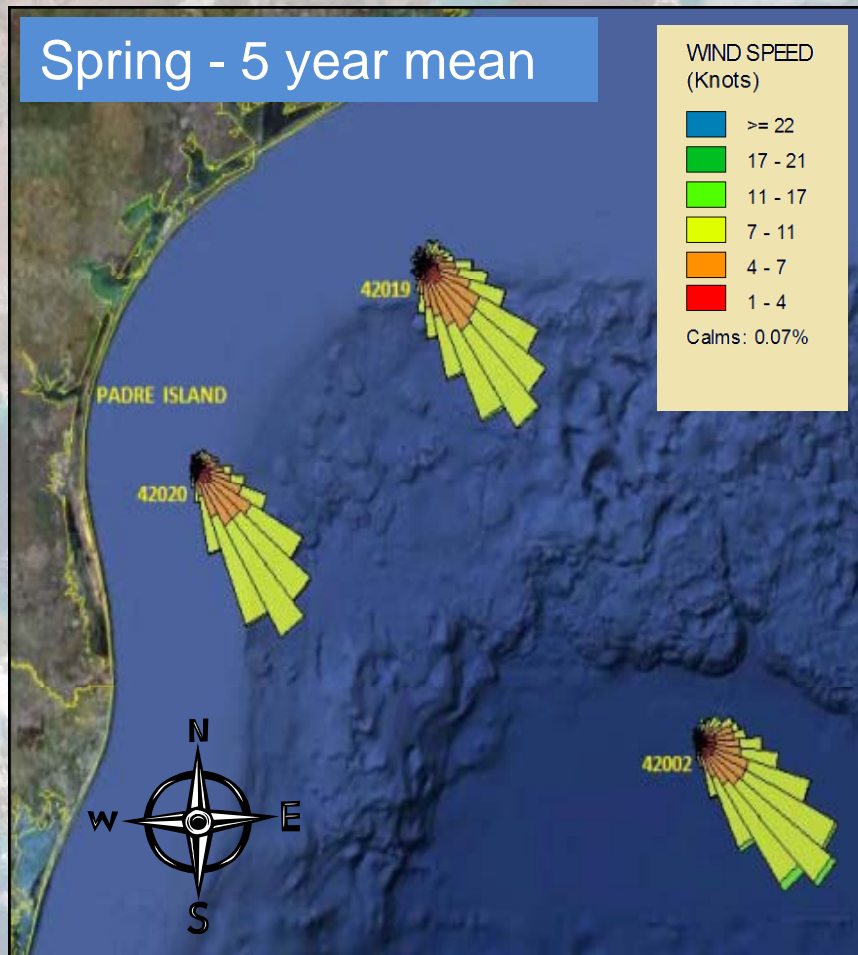


During spring months, buoys 42020 & 42019 have a dominant SSE wind, while buoy 42002 shows a dominant SE wind.

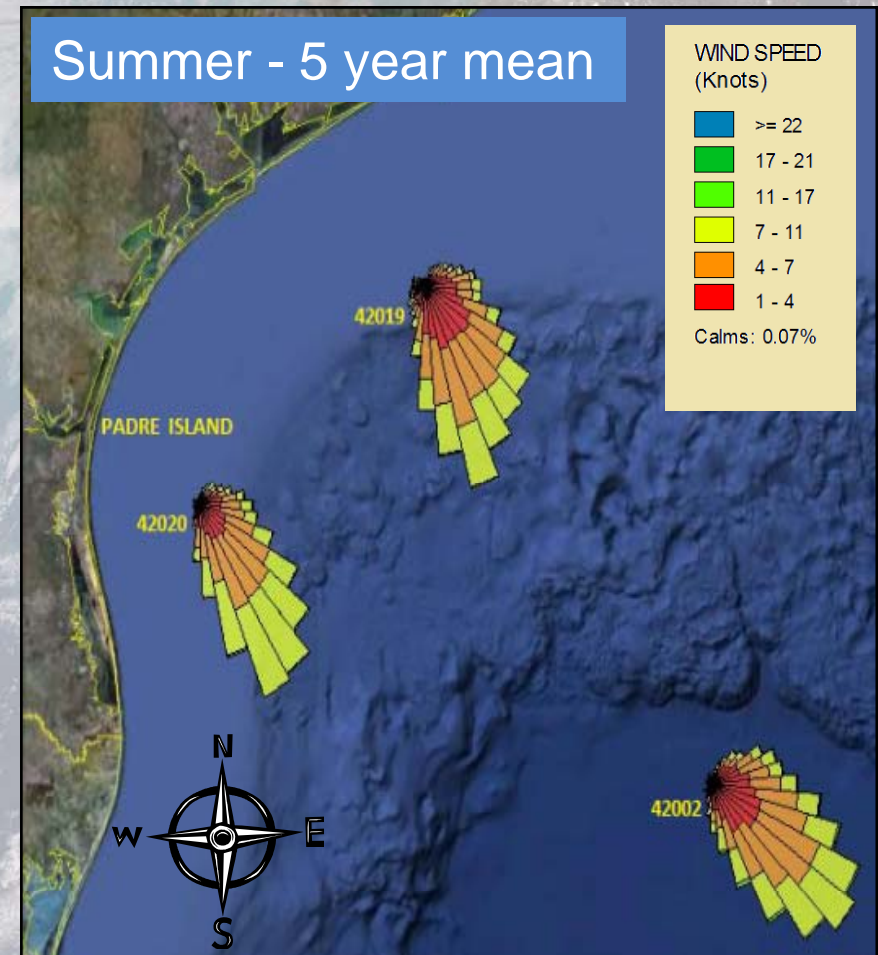


Winds during the summer months are slightly more variable, although S and SE winds remain dominant.

Results – Wind Data

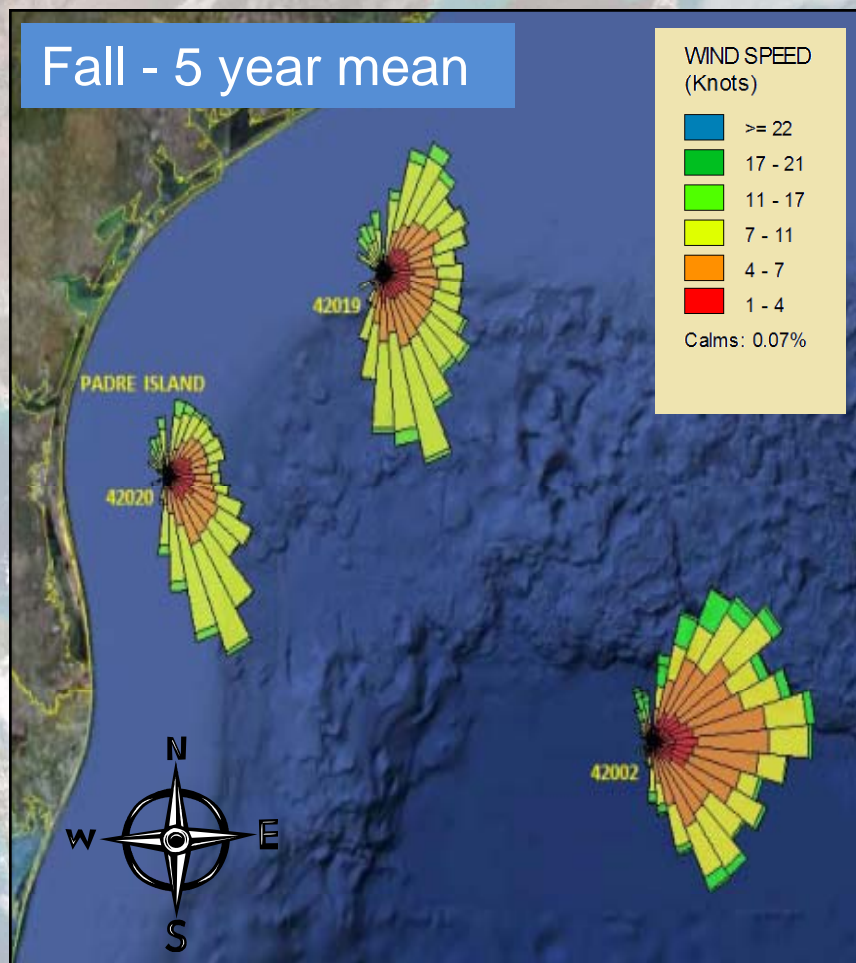

Notice in the fall months, a strong NE & N wind presence, as well as SE and SSE winds.

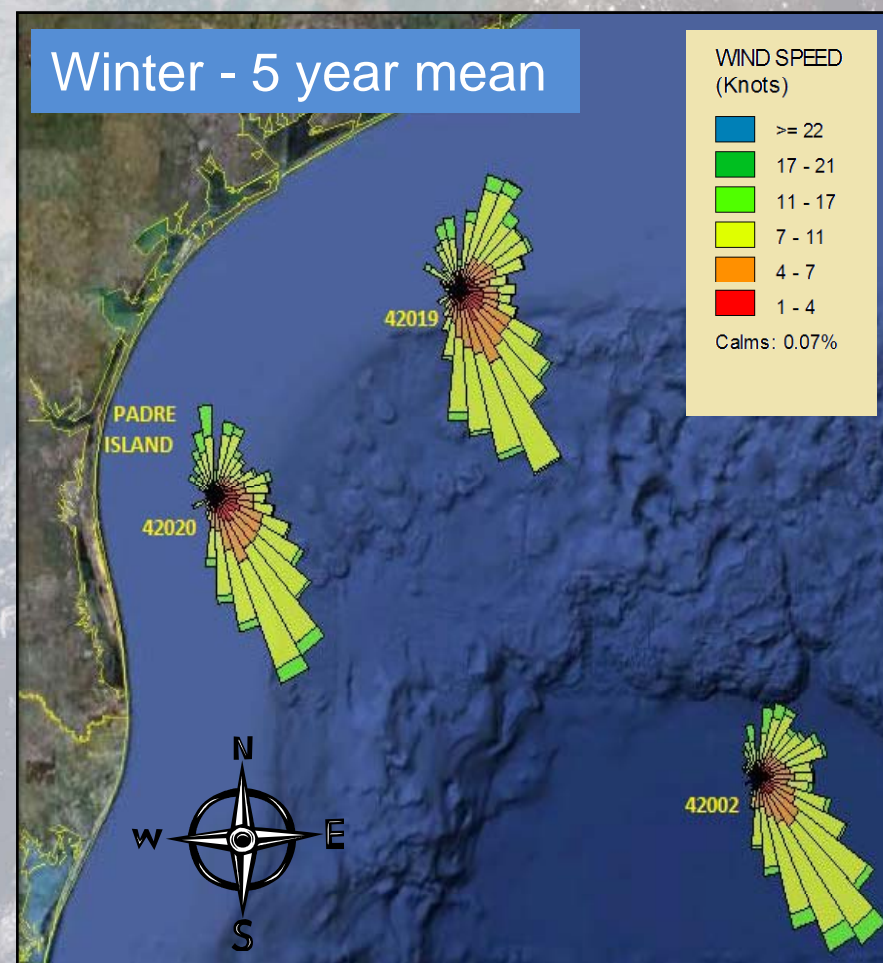

Although the dominant wind stays SE, a northerly wind is present during the winter months.

Discussion and Conclusion

Conclusions:

- Use of satellite altimeter data from multiple sources enabled the production of geospatial maps of SSH, geostrophic velocity, and particle path predictions.
- MODIS SST data provided a means to monitor the position of the loop current; however, this method is not useful in the warmer summer months.
- Particle path predictions on surface waters were effectively produced using the Runge-Kutta integration method and tri-cubic interpolation.
- Wind data from NDBC buoys provided useful information for inferring the dispersal of marine debris as it nears the coast.
- Marine debris may negatively impact critical habitat for many endangered and threatened coastal species, such as the Kemp's ridley sea turtle.

Limitations:

- The loop current is not the only force distributing debris throughout the Gulf; prevailing wind patterns and long shore transport influence debris dispersal in nearshore environments.
- MODIS SST was only useful during cooler months and is also hindered by cloud cover.

Future Work

Possible future work:

- **Collect and analyze data showing marine debris accumulation along additional Gulf of Mexico coastlines to compare with PINS**
- **Use NASA data from the SeaWinds instrument onboard the *QuickSCAT* satellite for additional retrospective wind data analysis**
- **Include data on longshore transport rates along the Texas Gulf Coast**
- **Include Environmental Sensitivity Index (ESI) data for PINS to determine marine debris impacts to select species and habitats**
- **Include wind speed and direction into the Matlab codes to aid in predicting particle paths in a nearshore environment**

Acknowledgments

- **Joe Spruce - CSC Stennis Space Center**
- **Dr. Kenton Ross - SSAI**
- **Dr. Robert Leben - University of Colorado**
- **Neal Parry - NOAA Marine Debris Division**
- **William Botts - Education Coordinator, PINS**
- **Gabriel LoDolce - University of Colorado**
- **Cheri Miller - DEVELOP Southeast Region Coordinator**
- **Brandie Mitchell - DEVELOP Stennis Student Director**
- **Jason Jones - DEVELOP National Program**

